

DATE: December 20, 2023
TO: Scott Bering, Second Street Family LP
FROM: Haseeb Qureshi, Alyssa Barnett, Shannon Wong
JOB NO: 15669-02 AQ, GHG & EA Assesment

SECOND STREET FAMILY AIR QUALITY, GREENHOUSE GAS AND ENERGY ASSESSMENT

Scott Bering,

Urban Crossroads, Inc. is pleased to provide the following Air Quality, Greenhouse Gas and Energy Assessment for the Second Street Family (**Project**), which is located in the City of Corona.

PROJECT OVERVIEW

The Project is located at APN 118-270-053 and 118-270-055 in the City of Corona as shown on Exhibit 1. It is our understanding that the Project consists of a 115 dwelling unit affordable housing development¹, as shown on Exhibit 2. The proposed project is anticipated to be constructed and fully operational by the year 2026.

SUMMARY OF FINDINGS

Results of the assessment indicate that the Project would result in a less than significant impact with respect to air quality, greenhouse gases and energy and no mitigation is required.

¹At the time the underlying modeling was conducted, the dwelling unit count was 110 DUs and is reflected in the modeling. The emissions totals presented herein would negligibly increase from the additional 5 DUs. Emissions associated with the additional 5 DUs would not result in any air quality, greenhouse gas, or energy impacts that have not already been disclosed in this assessment.

EXHIBIT 1: LOCATION MAP



LEGEND:
N
[Red dashed box] Site Boundary

EXHIBIT 2: PRELIMINARY SITE PLAN



PROJECT AIR QUALITY IMPACTS

AIR QUALITY SETTING

SOUTH COAST AIR BASIN (SCAB)

The Project site is located in the SCAB within the jurisdiction of South Coast Air Quality Management District (SCAQMD) (1). The SCAQMD was created by the 1977 Lewis-Presley Air Quality Management Act, which merged four county air pollution control bodies into one regional district. Under the Act, the SCAQMD is responsible for bringing air quality in areas under its jurisdiction into conformity with federal and state air quality standards. As previously stated, the Project site is located within the SCAB, a 6,745-square mile subregion of the SCAQMD, which includes portions of Los Angeles, Riverside, and San Bernardino Counties, and all of Orange County.

The SCAB is bounded by the Pacific Ocean to the west and the San Gabriel, San Bernardino, and San Jacinto Mountains to the north and east. The Los Angeles County portion of the Mojave Desert Air Basin is bounded by the San Gabriel Mountains to the south and west, the Los Angeles / Kern County border to the north, and the Los Angeles / San Bernardino County border to the east. The Riverside County portion of the Salton Sea Air Basin is bounded by the San Jacinto Mountains in the west and spans eastward up to the Palo Verde Valley.

Regional Climate

The regional climate has a substantial influence on air quality in the SCAB. In addition, the temperature, wind, humidity, precipitation, and amount of sunshine influence the air quality.

The annual average temperatures throughout the SCAB vary from the low to middle 60s degrees Fahrenheit (°F). Due to a decreased marine influence, the eastern portion of the SCAB shows greater variability in average annual minimum and maximum temperatures. January is the coldest month throughout the SCAB, with average minimum temperatures of 47°F in downtown Los Angeles and 36°F in San Bernardino. All portions of the SCAB have recorded maximum temperatures above 100°F.

Although the climate of the SCAB can be characterized as semi-arid, the air near the land surface is quite moist on most days because of the presence of a marine layer. This shallow layer of sea air is an important modifier of SCAB climate. Humidity restricts visibility in the SCAB, and the conversion of sulfur dioxide (SO₂) to sulfates (SO₄) is heightened in air with high relative humidity. The marine layer provides an environment for that conversion process, especially during the spring and summer months. The annual average relative humidity within the SCAB is 71 percent (%) along the coast and 59% inland. Since the ocean effect is dominant, periods of heavy early morning fog are frequent and low stratus clouds are a characteristic feature. These effects decrease with distance from the coast.

More than 90% of the SCAB's rainfall occurs from November through April. The annual average rainfall varies from approximately nine inches in Riverside to fourteen inches in downtown Los Angeles. Monthly and yearly rainfall totals are extremely variable. Summer rainfall usually consists of widely scattered thunderstorms near the coast and slightly heavier shower activity in the eastern portion of the SCAB with frequency being higher near the coast.

Due to its generally clear weather, about three-quarters of available sunshine is received in the SCAB. The remaining one-quarter is absorbed by clouds. The ultraviolet portion of this abundant radiation is a key factor in photochemical reactions. On the shortest day of the year there are approximately 10 hours of possible sunshine, and on the longest day of the year there are approximately 14½ hours of possible sunshine.

The importance of wind to air pollution is considerable. The direction and speed of the wind determines the horizontal dispersion and transport of the air pollutants. During the late autumn to early spring rainy season, the SCAB is subjected to wind flows associated with the traveling storms moving through the region from the northwest. This period also brings five to ten periods of strong, dry offshore winds, locally termed "Santa Anas" each year. During the dry season, which coincides with the months of maximum photochemical smog concentrations, the wind flow is bimodal, typified by a daytime onshore sea breeze and a nighttime offshore drainage wind. Summer wind flows are created by the pressure differences between the relatively cold ocean and the unevenly heated and cooled land surfaces that modify the general northwesterly wind circulation over southern California. Nighttime drainage begins with the radiational cooling of the mountain slopes. Heavy, cool air descends the slopes and flows through the mountain passes and canyons as it follows the lowering terrain toward the ocean. Another characteristic wind regime in the SCAB is the "Catalina Eddy," a low level cyclonic (counterclockwise) flow centered over Santa Catalina Island which results in an offshore flow to the southwest. On most spring and summer days, some indication of an eddy is apparent in coastal sections.

In the SCAB, there are two distinct temperature inversion structures that control vertical mixing of air pollution. During the summer, warm high-pressure descending (subsiding) air is undercut by a shallow layer of cool marine air. The boundary between these two layers of air is a persistent marine subsidence/inversion. This boundary prevents vertical mixing which effectively acts as an impervious lid to pollutants over the entire SCAB. The mixing height for the inversion structure is normally situated 1,000 to 1,500 feet above mean sea level.

A second inversion-type forms in conjunction with the drainage of cool air off the surrounding mountains at night followed by the seaward drift of this pool of cool air. The top of this layer forms a sharp boundary with the warmer air aloft and creates nocturnal radiation inversions. These inversions occur primarily in the winter when nights are longer and onshore flow is weakest. They are typically only a few hundred feet above mean sea level. These inversions effectively trap pollutants, such as nitrogen oxides (NO_x) and carbon monoxide (CO) from vehicles, as the pool of cool air drifts seaward. Winter is therefore a period of high levels of primary pollutants along the coastline.

Wind Patterns and Project Location

The distinctive climate of the Project area and the SCAB is determined by its terrain and geographical location. The SCAB is located in a coastal plain with connecting broad valleys and low hills, bounded by the Pacific Ocean in the southwest quadrant with high mountains forming the remainder of the perimeter.

Wind patterns across the south coastal region are characterized by westerly and southwesterly onshore winds during the day and easterly or northeasterly breezes at night. Winds are characteristically light although the speed is somewhat greater during the dry summer months than during the rainy winter season.

Criteria Pollutants

Both the U.S. Environmental Protection Agency (EPA) and the California Air Resources Board (CARB) have established ambient air quality standards for common pollutants. These ambient air quality standards are levels of contaminants representing safe levels that avoid specific adverse health effects associated with each pollutant. The ambient air quality standards cover what are called “criteria” pollutants because the health and other effects of each pollutant are described in criteria documents. The six criteria pollutants are ozone (O₃) (precursor emissions include NO_x and reactive organic gases (ROG), CO, particulate matter (PM), nitrogen dioxide (NO₂), sulfur dioxide (SO₂), and lead. Areas that meet ambient air quality standards are classified as attainment areas, while areas that do not meet these standards are classified as nonattainment areas. The Riverside County portion of the SCAB is designated as a nonattainment area for the federal O₃ and PM_{2.5} standards and is also a nonattainment area for the state standards for O₃, PM₁₀, and PM_{2.5}.

Sensitive Receptor Locations

Some people are especially sensitive to air pollution and are given special consideration when evaluating air quality impacts from projects. These groups of people include children, the elderly, and individuals with pre-existing respiratory or cardiovascular illness. Structures that house these persons or places where they gather are defined as “sensitive receptors”. These structures typically include uses such as residences, hotels, and hospitals where an individual can remain for 24 hours. Consistent with the LST Methodology, the nearest land use where an individual could remain for 24 hours to the Project site has been used to determine construction and operational air quality impacts for emissions of PM₁₀ and PM_{2.5}, since PM₁₀ and PM_{2.5} thresholds are based on a 24-hour averaging time.

Receptors in the Project study area are described below. All distances are measured from the Project site boundary to the outdoor living areas (e.g., backyards) or at the building façade, whichever is closer to the Project site. Receptors in the Project study area are shown on Exhibit 2 under the Localized Construction Emissions section later in the report.

- Receptor R1 represents the existing residence at 307 S Buena Vista Ave, approximately 67 feet east of the Project site. Since there are no private outdoor living areas (backyards) facing the Project site, receptor R1 is placed at the building façade.
- Receptor R2 represents CNUUSD Printshop at 300 S Buena Vista Ave, approximately 58 feet south of the Project site. R2 is placed in the private outdoor living areas (backyard) facing the Project site.

REGULATORY BACKGROUND

FEDERAL REGULATIONS

The EPA is responsible for setting and enforcing the national ambient air quality standards (NAAQS) for O₃, CO, NO_x, SO₂, PM₁₀, and lead (Pb) (2). The EPA has jurisdiction over emissions sources that are under the authority of the federal government including aircraft, locomotives, and emissions sources outside state waters (Outer Continental Shelf). The EPA also establishes

emission standards for vehicles sold in states other than California. Automobiles sold in California must meet the stricter emission requirements of CARB.

The Federal Clean Air Act (CAA) was first enacted in 1955 and has been amended numerous times in subsequent years (1963, 1965, 1967, 1970, 1977, and 1990). The CAA establishes the federal air quality standards, the NAAQS, and specifies future dates for achieving compliance (3). The CAA also mandates that each state submit and implement state implementation plans (SIPs) for local areas not meeting these standards. These plans must include pollution control measures that demonstrate how the standards will be met.

The 1990 amendments to the CAA that identify specific emission reduction goals for areas not meeting the NAAQS require a demonstration of reasonable further progress toward attainment and incorporate additional sanctions for failure to attain or to meet interim milestones. The sections of the CAA most directly applicable to the development of the Project site include Title I (Non-Attainment Provisions) and Title II (Mobile Source Provisions) (4) (5). Title I provisions were established with the goal of attaining the NAAQS for the following criteria pollutants O₃, NO₂, SO₂, PM₁₀, CO, PM_{2.5}, and Pb. The NAAQS were amended in July 1997 to include an additional standard for O₃ and to adopt a NAAQS for PM_{2.5}.

Mobile source emissions are regulated in accordance with Title II provisions. These provisions require the use of cleaner burning gasoline and other cleaner burning fuels such as methanol and natural gas. Automobile manufacturers are also required to reduce tailpipe emissions of hydrocarbons and NO_x. NO_x is a collective term that includes all forms of NO_x which are emitted as byproducts of the combustion process.

CALIFORNIA REGULATIONS

CARB

The CARB, which became part of the California EPA (CalEPA) in 1991, is responsible for ensuring implementation of the California Clean Air Act (AB 2595), responding to the federal CAA, and for regulating emissions from consumer products and motor vehicles. AB 2595 mandates achievement of the maximum degree of emissions reductions possible from vehicular and other mobile sources in order to attain the state ambient air quality standards by the earliest practical date. The CARB established the California ambient air quality standards (CAAQS) for all pollutants for which the federal government has NAAQS and, in addition, establishes standards for SO₄, visibility, hydrogen sulfide (H₂S), and vinyl chloride (C₂H₃Cl). However, at this time, H₂S and C₂H₃Cl are not measured at any monitoring stations in the SCAB because they are not considered to be a regional air quality problem. Generally, the CAAQS are more stringent than the NAAQS (6) (7).

Local air quality management districts, such as the SCAQMD, regulate air emissions from stationary sources such as commercial and industrial facilities. All air pollution control districts have been formally designated as attainment or non-attainment for each CAAQS.

Serious non-attainment areas are required to prepare Air Quality Management Plans (AQMP) that include specified emission reduction strategies in an effort to meet clean air goals. These plans are required to include:

- Application of Best Available Retrofit Control Technology to existing sources;

- Developing control programs for area sources (e.g., architectural coatings and solvents) and indirect sources (e.g. motor vehicle use generated by residential and commercial development);
- A District permitting system designed to allow no net increase in emissions from any new or modified permitted sources of emissions;
- Implementing reasonably available transportation control measures and assuring a substantial reduction in growth rate of vehicle trips and miles traveled;
- Significant use of low emissions vehicles by fleet operators;
- Sufficient control strategies to achieve a 5% or more annual reduction in emissions or 15% or more in a period of three years for ROG_s, NO_x, CO and PM₁₀. However, air basins may use alternative emission reduction strategy that achieves a reduction of less than 5% per year under certain circumstances.

AQMP

Currently, the NAAQS and CAAQS are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMP to meet the state and federal ambient air quality standards (8). AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

APPLICABLE REGULATORY REQUIREMENTS

SCAQMD Rules that are currently applicable during construction activity for this Project include but are not limited to Rule 403 (Fugitive Dust) and Rule 1113 (Architectural Coatings) (9) (10).

SCAQMD Rule 403

This rule is intended to reduce the amount of particulate matter entrained in the ambient air as a result of anthropogenic (human-made) fugitive dust sources by requiring actions to prevent and reduce fugitive dust emissions. Rule 403 applies to any activity or human-made condition capable of generating fugitive dust and requires best available control measures to be applied to earth moving and grading activities. This rule is intended to reduce PM₁₀ emissions from any transportation, handling, construction, or storage activity that has the potential to generate fugitive dust. PM₁₀ suppression techniques are summarized below.

- *Portions of a construction site to remain inactive longer than a period of three months will be seeded and watered until grass cover is grown or otherwise stabilized.*
- *All onsite roads will be paved as soon as feasible or watered periodically or chemically stabilized.*
- *All material transported offsite will be either sufficiently watered or securely covered to prevent excessive amounts of dust.*
- *The area disturbed by clearing, grading, earthmoving, or excavation operations will be minimized at all times.*

- *Where vehicles leave a construction site and enter adjacent public streets, the streets will be swept daily or washed down at the end of the workday to remove soil tracked onto the paved surface.*

SCAQMD Rule 1113

This rule serves to limit the volatile organic compound (VOC) content of architectural coatings used on projects in the SCAQMD. Any person who supplies, sells, offers for sale, or manufactures any architectural coating for use on projects in the SCAQMD must comply with the current VOC standards set in this rule.

METHODOLOGY

In May 2023, the California Air Pollution Control Officers Association (CAPCOA) in conjunction with other California air districts, including SCAQMD, released the latest version of the CalEEMod Version 2022.1.1.12. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (VOCs, NO_x, SO_x, CO, PM₁₀, and PM_{2.5}) from direct and indirect sources; and quantify applicable air quality emissions reductions achieved from mitigation measures (11). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality emissions.

Standards of Significance

The criteria used to determine the significance of potential Project-related air quality impacts are taken from the California Environmental Quality Act Guidelines (CEQA Guidelines) (14 CCR §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to air quality if it would (12):

- **Threshold 1:** *Conflict with or obstruct implementation of the applicable air quality plan.*
- **Threshold 2:** *Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard.*
- **Threshold 3:** *Expose sensitive receptors to substantial pollutant concentrations.*
- **Threshold 4:** *Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.*

AIR QUALITY REGIONAL EMISSIONS THRESHOLDS

The SCAQMD has developed regional significance thresholds for criteria pollutants, as summarized at Table 1 (13). The SCAQMD's CEQA Air Quality Significance Thresholds (April 2023) indicate that any projects in the South Coast Air Basin (SCAB) with daily emissions that exceed any of the indicated thresholds should be considered as having an individually and cumulatively significant air quality impact.

TABLE 1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS

Pollutant	Construction	Operations
NO _x	100 lbs/day	55 lbs/day
VOC	75 lbs/day	55 lbs/day
PM ₁₀	150 lbs/day	150 lbs/day
PM _{2.5}	55 lbs/day	55 lbs/day
SO _x	150 lbs/day	150 lbs/day
CO	550 lbs/day	550 lbs/day

lbs/day – Pounds Per Day

AIR QUALITY LOCALIZED EMISSIONS THRESHOLDS

For this Project, the appropriate Source Receptor Area (SRA) for the LST analysis is the SCAQMD Corona/Norco area monitoring station (SRA 22). LSTs apply to CO, NO₂, PM₁₀, and PM_{2.5}. The SCAQMD produced look-up tables for projects less than or equal to 5 acres in size. The SCAQMD’s screening look-up tables are utilized in determining localized impacts. It should be noted that since the look-up tables identify thresholds at only 1 acre, 2 acres, and 5 acres, linear regression has been utilized to determine localized significance thresholds. Consistent with SCAQMD guidance, the thresholds presented in Table 2 were calculated by interpolating the threshold values for the Project’s disturbed acreage.

The acres disturbed is based on the equipment list and days in the site preparation and grading phase according to the anticipated maximum number of acres a given piece of equipment can pass over in an 8-hour workday. The equipment-specific grading rates are summarized in the CalEEMod user’s guide, Appendix A: Calculation Details for CalEEMod (14). It should be noted that the disturbed area per day is representative of a piece of equipment making multiple passes over the same land area. In other words, one Rubber Tired Dozer can make multiple passes over the same land area totaling 0.5 acres in a given 8-hour day. Appendix A of the CalEEMod User Manual only identifies equipment-specific grading rates for Crawler Tractors, Graders, Rubber Tired Dozers, and Scrapers; therefore, Tractors/Loaders/Backhoes equipment that was included in the site preparation and grading phase was replaced with Crawler Tractors. For analytical purposes, emissions associated with peak site preparation and grading activities are considered for purposes of localized significance thresholds (LSTs) since this phase represents the maximum localized emissions that would occur. The Project’s construction activities could disturb a maximum of approximately 3.5 acres per day for site preparation and 2.5 acres per day for grading activities. Any other construction phases of development would result in lesser emissions and consequently lesser impacts than what is disclosed herein. As such, Table 2 presents thresholds for localized construction and operational emissions.

TABLE 2: MAXIMUM DAILY LOCALIZED EMISSIONS THRESHOLDS

Source	Activity	Emissions (lbs/day)			
		NO _x	CO	PM ₁₀	PM _{2.5}
Construction	Site Preparation	220 lbs/day	1,354 lbs/day	9 lbs/day	7 lbs/day
	Grading	187 lbs/day	1,123 lbs/day	7 lbs/day	6 lbs/day

¹Source of localized significance threshold (LSTs) is provided on page 16.

CONSTRUCTION ACTIVITIES

Construction activities associated with the Project would result in emissions of VOCs, NO_x, SO_x, CO, PM₁₀, and PM_{2.5}. Construction related emissions are expected from the following construction activities:

- *Site Preparation*
- *Grading (Import/Export)*
- *Building Construction*
- *Paving*
- *Architectural Coating*

GRADING ACTIVITIES

Dust is typically a major concern during grading activities. Because such emissions are not amenable to collection and discharge through a controlled source, they are called “fugitive emissions”. Fugitive dust emissions rates vary as a function of many parameters (soil silt, soil moisture, wind speed, area disturbed, number of vehicles, depth of disturbance or excavation, etc.). CalEEMod was utilized to calculate fugitive dust emissions resulting from this phase of activity. Per client provided data, the Project is expected to balance, and import/export would not be required.

ON-ROAD TRIPS

Construction generates on-road vehicle emissions from vehicle usage for workers, vendors, and haul trucks commuting to and from the site. Worker and hauling trips are based on CalEEMod defaults. It should be noted that for vendor trips, specifically, CalEEMod only assigns vendor trips to the Building Construction phase. Vendor trips would likely occur during all phases of construction. As such, the CalEEMod defaults for vendor trips have been adjusted based on a ratio of the total vendor trips to the number of days of each subphase of activity.

CONSTRUCTION DURATION

For purposes of analysis, construction of Project is expected to commence in January 2025 and would last through June 2026. The construction schedule utilized in the analysis represents a “worst-case” analysis scenario should construction occur any time after the respective dates since

emission factors for construction decrease as time passes and the analysis year increases due to emission regulations becoming more stringent². The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per CEQA Guidelines (15).

REGIONAL CONSTRUCTION EMISSIONS SUMMARY

The estimated maximum daily construction emissions without mitigation are summarized in Table 3. Detailed construction model outputs are presented in Attachment A. Under the assumed scenarios, emissions resulting from the Project construction will not exceed thresholds established by the SCAQMD for emissions of any criteria pollutant and no mitigation is required.

TABLE 3: REGIONAL CONSTRUCTION EMISSIONS SUMMARY

Source	Emissions (lbs/day)					
	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Summer						
2025	1.58	12.06	20.39	0.03	1.61	0.70
2026	43.89	20.10	34.38	0.05	2.36	1.08
Winter						
2025	3.93	35.82	31.78	0.05	7.70	4.40
2026	1.48	11.41	18.50	0.03	1.55	0.65
Maximum Daily Emissions	43.89	35.82	34.38	0.05	7.70	4.40
SCAQMD Regional Threshold	75	100	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

¹PM₁₀ and PM_{2.5} source emissions reflect 3x daily watering per SCAQMD Rule 403 for fugitive dust.

REGIONAL OPERATIONAL EMISSIONS

Operational activities associated with the Project would result in emissions of VOCs, NO_x, CO, SO_x, PM₁₀, and PM_{2.5}. Operational related emissions are expected from the following primary sources: area source emissions, energy source emissions, and mobile source emissions.

The proposed Project related operational air quality impacts derive primarily from vehicle trips generated by the Project. Trip generation statistics published in the Institute of Transportation Engineers (ITE) Trip Generation Manual (11th Edition, 2021) for the Affordable Housing (ITE Land Use Code 223) land use category were utilized in this analysis (16).

² As shown in the CalEEMod User’s Guide Version 2022.1.1.12, Section 4.3 “Off-Road Equipment” as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.

The estimated operation-source emissions from the Project are summarized in Table 4. Detailed operation model outputs are presented in Attachment A.

TABLE 4: TOTAL PROJECT REGIONAL OPERATIONAL EMISSIONS

Source	Emissions (lbs/day)					
	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Summer						
Mobile Source	5.55	5.52	51.59	0.13	11.51	2.99
Area Source	3.33	1.88	7.01	0.01	0.15	0.15
Energy Source	0.03	0.47	0.20	0.00	0.04	0.04
Total Maximum Daily Emissions	8.91	7.88	58.80	0.15	11.69	3.17
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO
Winter						
Mobile Source	5.20	5.92	43.04	0.12	11.51	2.99
Area Source	2.78	1.82	0.78	0.01	0.15	0.15
Energy Source	0.03	0.47	0.20	0.00	0.04	0.04
Total Maximum Daily Emissions	8.00	8.22	44.02	0.14	11.69	3.17
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

SENSITIVE RECEPTORS

The analysis uses the methodology included in the SCAQMD *Final Localized Significance Threshold Methodology* (LST Methodology) (17). The SCAQMD has established that impacts to air quality are significant if there is a potential to contribute or cause localized exceedances of the federal and/or state ambient air quality standards (NAAQS/CAAQS). Collectively, these are referred to as Localized Significance Thresholds (LSTs). The SCAQMD established LSTs in response to the SCAQMD Governing Board’s Environmental Justice Initiative I-4³. LSTs represent the maximum emissions from a project that will not cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard at the sensitive receptor. The SCAQMD states that lead agencies can use the LSTs as another indicator of significance in its air quality impact analyses.


³ The purpose of SCAQMD’s Environmental Justice program is to ensure that everyone has the right to equal protection from air pollution and fair access to the decision-making process that works to improve the quality of air within their communities. Further, the SCAQMD defines Environmental Justice as “...equitable environmental policymaking and enforcement to protect the health of all residents, regardless of age, culture, ethnicity, gender, race, socioeconomic status, or geographic location, from the health effects of air pollution.”

The SCAQMD recommends that the nearest sensitive receptor be considered when determining the Project's potential to cause an individual or cumulatively significant impact. The nearest land use where an individual could remain for 24 hours to the Project site has been used to determine localized construction and operational air quality impacts for emissions of PM₁₀ and PM_{2.5} (since PM₁₀ and PM_{2.5} thresholds are based on a 24-hour averaging time). The nearest receptor used for evaluation of localized impacts of PM₁₀ and PM_{2.5} is location R1 represented by the existing residence at 307 S Buena Vista Ave, approximately 67 feet (20 meters) east of the Project site.

As previously stated, and consistent with LST Methodology, the nearest industrial/commercial use to the Project site is used to determine construction and operational LST air impacts for emissions of NO_x and CO as the averaging periods for these pollutants are shorter (8 hours or less) and it is reasonable to assume that an individual could be present at these sites for periods of one to 8 hours. Based on review of the Project area, construction activity surrounds the Project site. As such, it can be assumed that an individual can be present at these construction areas for a period of 8 hours. The nearest receptor used for evaluation of localized impacts of NO_x and CO is location R2 represented by 300 S Buena Vista Ave, approximately 58 feet (18 meters) south of the Project site.

It should be noted that the *LST Methodology* explicitly states that *"It is possible that a project may have receptors closer than 25 meters. Projects with boundaries located closer than 25 meters to the nearest receptor should use the LSTs for receptors located at 25 meters (17)."* As such, for evaluation of localized PM₁₀, PM_{2.5}, NO_x, and CO, a 25-meter distance will be used.

EXHIBIT 2: SENSITIVE RECEPTOR LOCATIONS

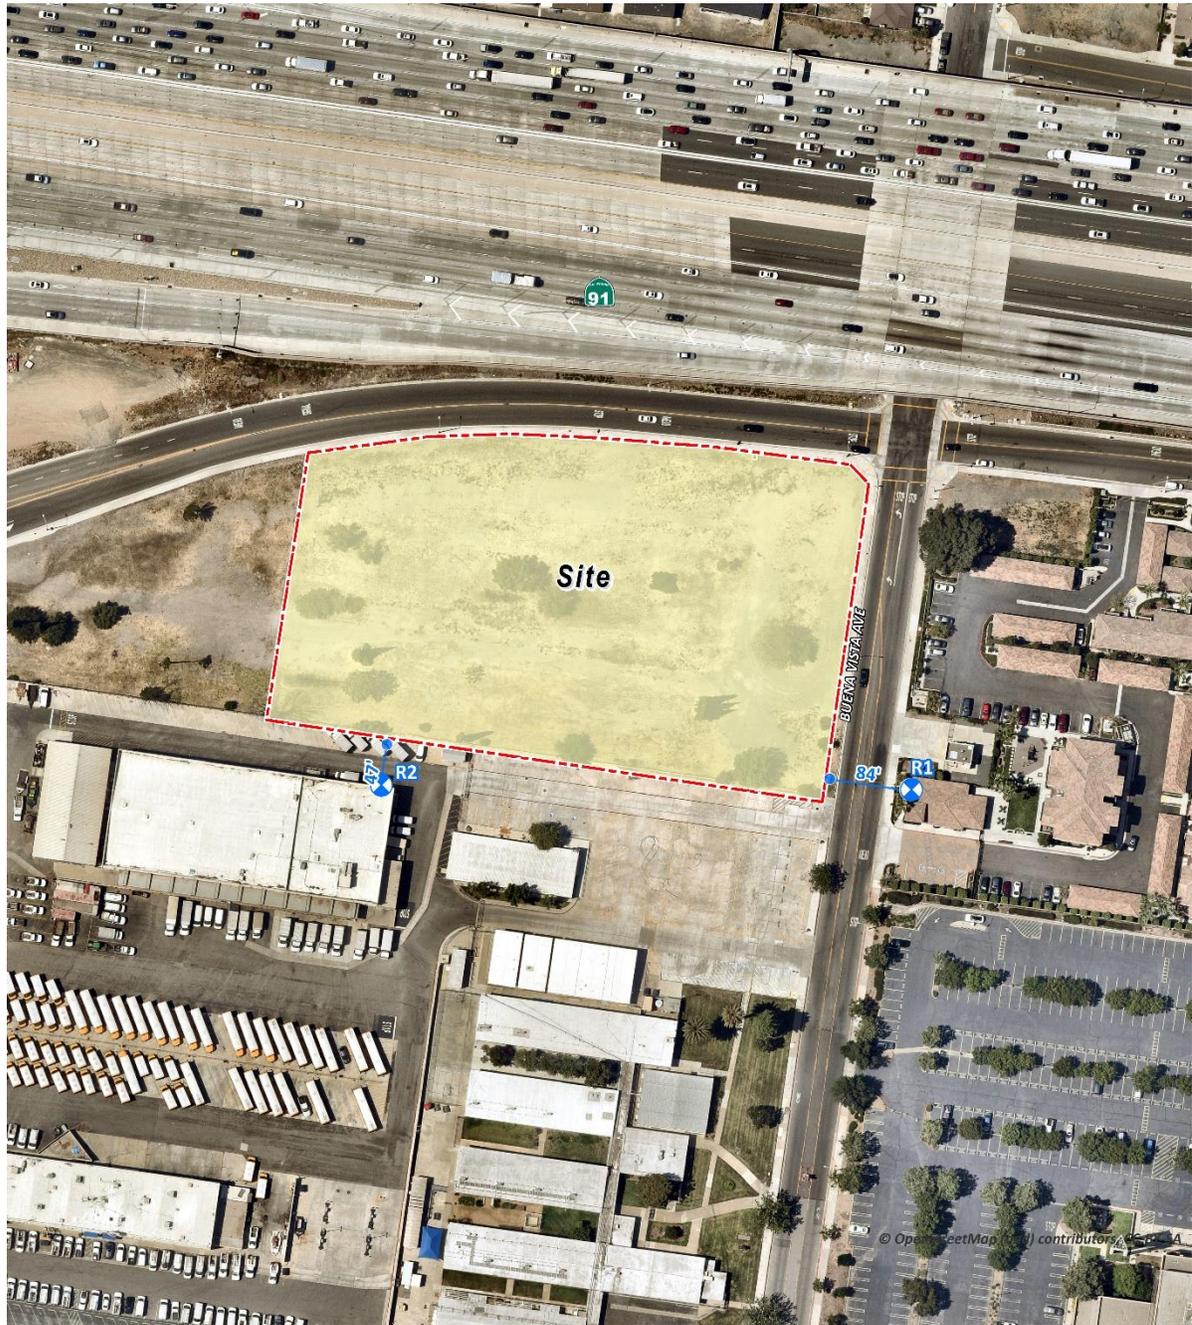

- LEGEND:**
-  Site Boundary
 -  Receptor Locations
 -  Distance from receptor to Project site boundary (in feet)

LOCALIZED CONSTRUCTION EMISSIONS

Table 5 identifies the localized impacts at the nearest receptor location in the vicinity of the Project. Outputs from the model runs for construction LSTs are provided in Attachment A. For analytical purposes, emissions associated with peak site preparation and grading activities are considered for purposes of LSTs since these phases represent the maximum localized emissions that would occur. Any other construction phases of development that overlap would result in less emissions and consequently less impacts than what is disclosed herein. As shown in Table 5, emissions resulting from the construction will not exceed the numerical thresholds of significance established by the SCAQMD for any criteria pollutant. Thus, a less than significant impact would occur for localized Project-related construction-source emissions and no mitigation is required.

TABLE 5: PROJECT LOCALIZED CONSTRUCTION IMPACTS

On-Site Emissions	Emissions (lbs/day)			
	NO _x	CO	PM ₁₀	PM _{2.5}
Site Preparation				
Maximum Daily Emissions	35.73	30.76	7.47	4.35
SCAQMD Localized Threshold	220	1,354	9	7
Threshold Exceeded?	NO	NO	NO	NO
Grading				
Maximum Daily Emissions	19.34	18.35	3.31	1.90
SCAQMD Localized Threshold	187	1,123	7	6
Threshold Exceeded?	NO	NO	NO	NO

LOCALIZED OPERATIONAL EMISSIONS

The proposed project is located on approximately 3.48 acres, and the total development is proposed to consist of a 109 dwelling unit affordable housing development. According to SCAQMD LST methodology, LSTs would apply to the operational phase of a proposed project, if the project includes stationary sources, or attracts mobile sources that may spend long periods queuing and idling at the site (e.g., transfer facilities and warehouse buildings). The proposed project does not include such uses, and thus, due to the lack of significant stationary source emissions, no LST analysis is needed for operations.

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 1

Would the Project conflict with or obstruct implementation of the applicable air quality plan?

The Project site is located within the SCAB, which is characterized by relatively poor air quality. The SCAQMD has jurisdiction over an approximately 10,743 square-mile area consisting of the four-county Basin and the Los Angeles County and Riverside County portions of what use to be referred to as the Southeast Desert Air Basin. In these areas, the SCAQMD is principally responsible for air pollution control, and works directly with the Southern California Association

of Governments (SCAG), county transportation commissions, local governments, as well as state and federal agencies to reduce emissions from stationary, mobile, and indirect sources to meet state and federal ambient air quality standards.

Currently, these state and federal air quality standards are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMPs to meet the state and federal ambient air quality standards. AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

In December 2022, the SCAQMD released the *Final 2022 AQMP (2022 AQMP)*. The *2022 AQMP* continues to evaluate current integrated strategies and control measures to meet the CAAQS, as well as explore new and innovative methods to reach its goals. Some of these approaches include utilizing incentive programs, recognizing existing co-benefit programs from other sectors, and developing a strategy with fair-share reductions at the federal, state, and local levels (18). Similar to the 2016 AQMP, the *2022 AQMP* incorporates scientific and technological information and planning assumptions, including the *2020-2045 RTP/SCS*, a planning document that supports the integration of land use and transportation to help the region meet the federal CAA requirements (19). The Project's consistency with the AQMP will be determined using the *2022 AQMP* as discussed below.

Criteria for determining consistency with the AQMP are defined in Chapter 12, Section 12.2 and Section 12.3 of the 1993 CEQA Handbook (20). These indicators are discussed below.

The proposed Project will not result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMP.

The violations under this criterion refer to the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if regional or localized significance thresholds were exceeded.

CAAQS and NAAQS violations would occur if regional or localized significance thresholds were exceeded. As evaluated, the Project's regional and localized construction and operational-source emissions would not exceed applicable regional significance thresholds. As such, a less than significant impact is expected.

On the basis of the preceding discussion, the Project is determined to be consistent with the first criterion.

The Project will not exceed the assumptions in the AQMP based on the years of Project build-out phase.

The 2022 AQMP demonstrates that the applicable ambient air quality standards can be achieved within the timeframes required under federal law. Growth projections from local general plans adopted by cities in the district are provided to the SCAG, which develops regional growth forecasts, which are then used to develop future air quality forecasts for the AQMP. Development consistent with the growth projections in City of Corona General Plan is considered to be consistent with the AQMP.

Peak day emissions generated by construction activities are largely independent of land use assignments, but rather are a function of development scope and maximum area of disturbance.

Irrespective of the site's land use designation, development of the site to its maximum potential would likely occur, with disturbance of the entire site occurring during construction activities. As such, when considering that no emissions thresholds will be exceeded, a less than significant impact would result.

The Project is currently designated for High Density Residential within the City of Corona General Plan, which is consistent with the proposed Project land use. The Project consists of a 109 dwelling unit affordable housing development.

The proposed High Density Residential designation allows for multi-family residential, including garden apartments and condos, common open space, landscaping, and other site amenities (21). The proposed residential use is consistent with uses allowed under the proposed High Density Residential land use designation. Furthermore, the Project, as evaluated herein would not result in or cause exceedances of regional or localized air quality significance thresholds. Emissions generated by the Project are accurately represented in the AQMP emissions modeling, air pollution control strategies, and associated assumptions for emissions affecting the Basin.

As the proposed Project is consistent with site's land use designation, would not exceed any applicable regional or local thresholds, and would not result in or cause NAAQS or CAAQS violations, the Project is therefore considered to be consistent with the AQMP and a less than significant impact is expected.

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 2

Would the Project result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard?

The CAAQS designate the region in which the Project site is located as nonattainment for O₃, PM₁₀, and PM_{2.5} while the NAAQS designates the Project site's region as nonattainment for O₃ and PM_{2.5}.

The SCAQMD has published a report on how to address cumulative impacts from air pollution: White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution (22). In this report the SCAQMD clearly states (Page D-3):

“...the SCAQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or EIR. The only case where the significance thresholds for project specific and cumulative impacts differ is the Hazard Index (HI) significance threshold for TAC emissions. The project specific (project increment) significance threshold is HI > 1.0 while the cumulative (facility-wide) is HI > 3.0. It should be noted that the HI is only one of three TAC emission significance thresholds considered (when applicable) in a CEQA analysis. The other two are the maximum individual cancer risk (MICR) and the cancer burden, both of which use the same significance thresholds (MICR of 10 in 1 million and cancer burden of 0.5) for project specific and cumulative impacts.

Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant.”

Therefore, this analysis assumes that individual projects that do not generate operational or construction emissions that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would also not cause a cumulatively considerable increase in emissions for those pollutants for which SCAB is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Alternatively, individual project-related construction and operational emissions that exceed SCAQMD thresholds for project-specific impacts would be considered cumulatively considerable.

Construction Impacts

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project construction-source air pollutant emissions would not result in exceedances of regional thresholds. Therefore, the proposed Project construction-source emissions would be considered less than significant on a project-specific and cumulative basis.

Operational Impacts

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project operational-source air pollutant emissions would not result in exceedances of regional thresholds. Therefore, the proposed Project operational-source emissions would be considered less than significant on a project-specific and cumulative basis.

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 3

Would the expose sensitive receptors to substantial pollutant concentrations?

The potential impact of Project-generated air pollutant emissions at sensitive receptors has also been considered. Results of the LST analysis indicate that the Project will not exceed the SCAQMD localized significance thresholds during construction. Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations during Project construction.

Additionally, the Project will not exceed the SCAQMD localized significance thresholds during operational activity. Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations as the result of Project operations.

CO "HOT SPOT" ANALYSIS

As discussed below, the Project would not result in potentially adverse CO concentrations or "hot spots." An adverse CO concentration, known as a "hot spot", would occur if an exceedance of the state one-hour standard of 20 ppm or the eight-hour standard of 9 ppm were to occur.

It has long been recognized that CO hotspots are caused by vehicular emissions, primarily when idling at congested intersections. In response, vehicle emissions standards have become increasingly stringent in the last twenty years. Currently, the allowable CO emissions standard in California is a maximum of 3.4 grams/mile for passenger cars (there are requirements for certain vehicles that are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of increasingly sophisticated and efficient emissions control technologies, CO concentration in the SCAB is now designated as attainment.

To establish a more accurate record of baseline CO concentrations affecting the SCAB, a CO "hot spot" analysis was conducted in 2003 for four busy intersections in Los Angeles at the peak

morning and afternoon time periods⁴. This “hot spot” analysis did not predict any exceedance of the 1-hour (20.0 ppm) or 8-hour (9.0 ppm) CO standards, as shown on Table 6.

TABLE 6: CO MODEL RESULTS

Intersection Location	CO Concentrations (ppm)		
	Morning 1-hour	Afternoon 1-hour	8-hour
Wilshire Boulevard/Veteran Avenue	4.6	3.5	3.7
Sunset Boulevard/Highland Avenue	4	4.5	3.5
La Cienega Boulevard/Century Boulevard	3.7	3.1	5.2
Long Beach Boulevard/Imperial Highway	3	3.1	8.4

Notes: Federal 1-hour standard is 35 ppm and the deferral 8-hour standard is 9.0 ppm.

Based on the SCAQMD's 2003 AQMP and the 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan), peak carbon monoxide concentrations in the SCAB were a result of unusual meteorological and topographical conditions and not a result of traffic volumes and congestion at a particular intersection. As evidence of this, for example, of the 8.4 ppm 8-hr CO concentration measured at the Long Beach Blvd. and Imperial Hwy. intersection (i.e., the highest CO generating intersection within the “hot spot” analysis), only 0.7 ppm was attributable to the traffic volumes and congestion at this intersection; the remaining 7.7 ppm were due to the ambient air measurements at the time the 2003 AQMP was prepared (23). In contrast, an adverse CO concentration, known as a “hot spot”, would occur if an exceedance of the state one-hour standard of 20 parts per million (ppm) or the eight-hour standard of 9 ppm were to occur.

The ambient 1-hr and 8-hr CO concentration within the Project study area is estimated to be 2.0 ppm and 1.6 ppm, respectively (data from Metropolitan Riverside County station for 2021⁵). Therefore, even if the traffic volumes for the proposed Project were ten times the traffic volumes generated at the Long Beach Blvd. and Imperial Hwy. intersection, due to the on-going improvements in ambient air quality and vehicular emissions controls, the Project would not be capable of resulting in a CO “hot spot” at any study area intersections. As noted above, only 0.7 ppm were attributable to the traffic volumes and congestion at one of the busiest intersections in the SCAB. Therefore, if these traffic volumes were multiplied by ten times, it could be expected that the CO attributable to traffic would increase tenfold as well, resulting in 7 ppm – even if this were added to either the 1-hour or 8-hour CO concentrations within the Project study area, this would result in 9.1 ppm and 8.5 ppm for the 1-hr and 8-hr timeframes, respectively. Neither of which would exceed the applicable 1-hr standard of 20 ppm or the 8-hr standard of 9 ppm.

Similar considerations are also employed by other Air Districts when evaluating potential CO concentration impacts. More specifically, the Bay Area Air Quality Management District (BAAQMD) concludes that under existing and future vehicle emission rates, a given project would have to increase traffic volumes at a single intersection by more than 44,000 vehicles per hour

⁴ The CO “hot spot” analysis conducted in 2003 is the most current study used for CO “hot spot” analysis in the SCAB.

⁵ It should be noted that the Metropolitan Riverside County monitoring station CO data was utilized in lieu of the Corona/Norco Area monitoring station, as no CO data is available for 2021 at this monitoring station.

(vph)—or 24,000 vph where vertical and/or horizontal air does not mix—in order to generate a significant CO impact (24). Traffic volumes generating the CO concentrations for the “hot spot” analysis is shown on Table 5. The busiest intersection evaluated was that at Wilshire Boulevard and Veteran Avenue, which had AM/PM traffic volumes of 8,062 vph and 7,719 vph respectively (23).

The proposed Project considered herein would generate 529 trips and would not produce the volume of traffic required to generate a CO “hot spot” either in the context of the 2003 Los Angeles hot spot study or based on representative BAAQMD CO threshold considerations. Therefore, CO “hot spots” are not an environmental impact of concern for the proposed Project. Localized air quality impacts related to mobile-source emissions would therefore be less than significant.

TABLE 7: CO MODEL RESULTS

Intersection Location	Peak Traffic Volumes (vph)				
	Eastbound (AM/PM)	Westbound (AM/PM)	Southbound (AM/PM)	Northbound (AM/PM)	Total (AM/PM)
Wilshire Boulevard/Veteran Avenue	4,954/2,069	1,830/3,317	721/1,400	560/933	8,062/7,719
Sunset Boulevard/Highland Avenue	1,417/1,764	1,342/1,540	2,304/1,832	1,551/2,238	6,614/5,374
La Cienega Boulevard/Century Boulevard	2,540/2,243	1,890/2,728	1,384/2,029	821/1,674	6,634/8,674
Long Beach Boulevard/Imperial Highway	1,217/2,020	1,760/1,400	479/944	756/1,150	4,212/5,514

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 4

Would the Project result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

The potential for the Project to generate objectionable odors has also been considered. Land uses generally associated with odor complaints include:

- *Agricultural uses (livestock and farming)*
- *Wastewater treatment plants*
- *Food processing plants*
- *Chemical plants*
- *Composting operations*
- *Refineries*
- *Landfills*
- *Dairies*
- *Fiberglass molding facilities*

The Project does not contain land uses typically associated with emitting objectionable odors. Potential odor sources associated with the proposed Project may result from construction

equipment exhaust and the application of asphalt and architectural coatings during construction activities and the temporary storage of typical solid waste (refuse) associated with the proposed Project's (long-term operational) uses. Standard construction requirements would minimize odor impacts from construction. The construction odor emissions would be temporary, short-term, and intermittent in nature and would cease upon completion of the respective phase of construction and is thus considered less than significant. It is expected that Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with the solid waste regulations. The proposed Project would also be required to comply with SCAQMD Rule 402 to prevent occurrences of public nuisances. Therefore, odors associated with the proposed Project construction and operations would be less than significant and no mitigation is required (25).

PROJECT GHG ANALYSIS

City of Corona Climate Action Plan

In June 2020, the City adopted the 2019 CAP Update, which includes an interim goal of reducing GHG emission to 49% below 2008 levels by the year 2030 and a longer-term GHG reduction goal of 66% below 2008 levels by 2040. The interim and longer-term goals put the City on a path toward the state's long-term goal to reduce emissions 80% below 1990 levels by 2050. The 2019 CAP Update (establishes goals and policies that encourage energy efficiency, water conservation, alternative transportation, solid waste reduction, and clean energy.

The Project shall implement Screening Table Measures providing for a minimum of 100 points per the City's CAP Screening Tables. The Project would be consistent with the CAP's requirement to achieve at least 100 points for both the residential and non-residential portions of the Project and thus the Project is considered to have a less than significant individual and cumulatively considerable impact on GHG emissions. The City shall verify incorporation of the identified Screening Table Measures within the Project building plans and site designs prior to the issuance of building permit(s) and/or site plans (as applicable). Projects that achieve a total of 100 points or more are considered to have a less than significant individual and cumulative impact on GHG emissions.

GHG IMPACTS

Standards of Significance

According to the CEQA Guidelines Appendix G thresholds, to determine whether impacts from GHG emissions are significant. Would the project:

- **Threshold 1:** Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment?
- **Threshold 2:** Conflict with an applicable plan, policy or regulation adopted for the purpose of reducing the emissions of GHGs?

The evaluation of an impact under CEQA requires measuring data from a project against both existing conditions and a "threshold of significance." For establishing significance thresholds, the Office of Planning and Research's amendments to the CEQA Guidelines Section 15064.7(c) state

"[w]hen adopting thresholds of significance, a lead agency may consider thresholds of significance previously adopted or recommended by other public agencies, or recommended by experts, provided the decision of the lead agency to adopt such thresholds is supported by substantial evidence."

CEQA Guidelines Section 15064.4(a) further states, ". . . A lead agency shall have discretion to determine, in the context of a particular project, whether to: (1) Use a model or methodology to quantify greenhouse gas emissions resulting from a project, and which model or methodology to use . . . ; or (2) Rely on a qualitative analysis or performance-based standards."

CEQA Guidelines Section 15064.4 provides that a lead agency should consider the following factors, among others, in assessing the significance of impacts from greenhouse gas emissions:

- **Consideration #1:** The extent to which the project may increase or reduce greenhouse gas emissions as compared to the existing environmental setting.
- **Consideration #2:** Whether the project emissions exceed a threshold of significance that the lead agency determines applies to the project.
- **Consideration #3:** The extent to which the project complies with regulations or requirements adopted to implement a statewide, regional, or local plan for the reduction or mitigation of greenhouse gas emissions. Such regulations or requirements must be adopted by the relevant public agency through a public review process and must reduce or mitigate the project's incremental contribution of greenhouse gas emissions. In determining the significance of impacts, the lead agency may consider a project's consistency with the State's long-term climate goals or strategies, provided that substantial evidence supports the agency's analysis of how those goals or strategies address the project's incremental contribution to climate change and its conclusion that the project's incremental contribution is not cumulatively considerable.

The City of Corona has not adopted its own numeric threshold of significance for determining impacts with respect to GHG emissions. A screening threshold of 3,000 MT $\text{CO}_2\text{e/yr}$ to determine if additional analysis is required is an acceptable approach for small projects. This approach is a widely accepted screening threshold used by the City of Corona and numerous cities in the South Coast Air Basin and is based on the SCAQMD staff's proposed GHG screening threshold for stationary source emissions for non-industrial projects, as described in the SCAQMD's Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans ("SCAQMD Interim GHG Threshold"). The SCAQMD Interim GHG Threshold identifies a screening threshold to determine whether additional analysis is required (26). As noted by the SCAQMD:

"...the...screening level for stationary sources is based on an emission capture rate of 90% for all new or modified projects...the policy objective of [SCAQMD's] recommended interim GHG significance threshold proposal is to achieve an emission capture rate of 90% of all new or modified stationary source projects. A GHG significance threshold based on a 90% emission capture rate may be more appropriate to address the long-term adverse impacts associated with global climate change because most projects will be required to implement GHG reduction measures. Further, a 90% emission capture rate sets the emission threshold low enough to capture a substantial fraction of future stationary source projects that will be constructed to

accommodate future statewide population and economic growth, while setting the emission threshold high enough to exclude small projects that will in aggregate contribute a relatively small fraction of the cumulative statewide GHG emissions. This assertion is based on the fact that [SCAQMD] staff estimates that these GHG emissions would account for slightly less than 1% of future 2050 statewide GHG emissions target (85 [MMTCO₂e/yr]). In addition, these small projects may be subject to future applicable GHG control regulations that would further reduce their overall future contribution to the statewide GHG inventory. Finally, these small sources are already subject to [Best Available Control Technology] (BACT) for criteria pollutants and are more likely to be single-permit facilities, so they are more likely to have few opportunities readily available to reduce GHG emissions from other parts of their facility.” (27)

Thus, and based on guidance from the SCAQMD, if a non-industrial project would emit GHGs less than 3,000 MTCO₂e/yr, the project is not considered a substantial GHG emitter and the GHG impact is less than significant, requiring no additional analysis and no mitigation. On the other hand, if a non-industrial project would emit GHGs in excess of 3,000 MTCO₂e/yr, then the project could be considered a substantial GHG emitter, requiring additional analysis and potential mitigation. As previously discussed, a screening threshold of 3,000 MTCO₂e/yr is an acceptable approach for small projects to determine if additional analysis is required and is therefore applied for this Project.

GHG IMPACTS – CONSISTENCY WITH THRESHOLD NO. 1

Would the Project have the potential to generate direct or indirect GHG emissions that would result in a significant impact on the environment?

PROJECT GHG EMISSIONS

The estimated GHG emissions for the Project are summarized on Table 8. The estimated GHG emission include emissions from Carbon Dioxide (CO₂), Methane (CH₄), Nitrous Oxide (N₂O), and Refrigerants (R). As shown on Table 8, the Project would generate a total of approximately 1,464.96 MTCO₂e/yr. Detailed operation model outputs are presented in Attachment A.

TABLE 8: TOTAL PROJECT GHG EMISSIONS

Source	Emission (metric tons per year)				
	CO ₂	CH ₄	N ₂ O	R	Total CO ₂ e
Annual construction-related emissions amortized over 30 years	21.99	8.33E-04	6.07E-04	1.13E-02	22.20
Mobile Source	1,136.76	0.05	0.05	1.80	1,155.79
Area Source	28.16	0.00	0.00	0.00	28.19
Energy Source	220.85	0.02	0.00	0.00	221.84
Water Source	6.75	0.15	0.00	0.00	11.45
Waste Source	7.25	0.72	0.00	0.00	25.37
Refrigeration	0.00	0.00	0.00	0.12	0.12
Total CO₂e (All Sources)					1,464.96

The Project would result in approximately 1,464.96 MTCO₂e/yr; the proposed Project would not exceed the SCAQMD's numeric threshold of 3,000 MTCO₂e/yr. Thus, the Project would result in a less than significant impact with respect to GHG emissions.

GHG IMPACTS – CONSISTENCY WITH THRESHOLD NO. 2

Would the Project have the potential to conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs?

In November 2022, CARB released the Final 2022 Scoping Plan Update, which identifies the State's progress towards the statutory 2030 target, while providing a path towards carbon neutrality and reduce greenhouse gases emissions by 85% below 1990 levels by 2045. Recent studies show that the State's existing and proposed regulatory framework will allow the State to reduce its GHG emissions level to 40% below 1990 levels by 2030 (28). The Project would not conflict with any of the 2022 Scoping Plan elements as any regulations adopted would apply directly or indirectly to the Project.

Additionally, the Project will result in approximately 1,464.96 MTCO₂/yr and would not exceed the screening threshold of 3,000 MTCO₂e/yr. Thus, Project-related emissions would not have a significant direct or indirect impact on GHG and climate change and would therefore comply with the City's GHG policies under the CAP without mitigation. Overall, the proposed Project would not conflict with the County's CAP and impacts would be less than significant. No mitigation measures are necessary.

Finally, the Project will be consistent with the City's CAP Screening Tables (Screening Tables) to aid in measuring the reduction of GHG emissions attributable to certain design and construction measures incorporated in development projects. To this end, the Screening Tables establish categories of GHG Implementation Measures. Under each Implementation Measure category, mitigation or project design features (collectively "features") are assigned point values that correspond to the minimum GHG emissions reduction that would result from each feature. Projects that yield at least 100 points are considered to be consistent with the CAP. The Project will implement Screening Table Measures that would provide a minimum of 100 Screening Table Points and would therefore be considered consistent with the CAP, a list of anticipated measures is included in Attachment B. It should be noted that the specific measures listed in Attachment B may change, so long as the measures are substituted for other measures that achieve an equivalent number of points per the screening table.

PROJECT ENERGY ANALYSIS

Standards of Significance

Appendix F of the State CEQA Guidelines (29), states that the means of achieving the goal of energy conservation includes the following:

- Decreasing overall per capita energy consumption;
- Decreasing reliance on fossil fuels such as coal, natural gas, and oil; and
- Increasing reliance on renewable energy sources.

According to Appendix F, the analysis should include a description of energy conservation measures included as part of the project and should consider whether a project would result in inefficient, wasteful and unnecessary consumption of energy. In compliance with Appendix F and Appendix G of the State CEQA Guidelines (30), this report analyzes the Project’s anticipated energy use during construction and operations to determine if the Project would:

- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation; or
- Conflict with or obstruct a state or local plan for renewable energy or energy efficiency

Emission Factors Model

Vehicle fuel efficiencies for light-duty-auto vehicles (LDA), light-duty-trucks (LDT1), and light-duty-trucks (LDT2) were estimated using information generated within the 2021 version of the EMFAC developed by the California Air Resources Board (CARB). EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, and VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by CARB to project changes in future emissions from on-road mobile sources (31). EMFAC2021 was run for the LDA, LDT1, and LDT2 vehicle class within the Riverside South-Coast sub-area for the 2025 and 2026 calendar years. Data from EMFAC2021 is shown in Attachment C.

CONSTRUCTION ENERGY DEMANDS

CONSTRUCTION EQUIPMENT ELECTRICITY USAGE EMISSIONS

The *2023 National Construction Estimator* identifies a typical power cost per 1,000 sf of construction per month of \$2.50, which was used to calculate the Project’s total construction power cost (32).

Based on Table 9, the total power cost of the on-site electricity usage during the construction of the Project is estimated to be approximately \$8,657.25. As shown on Table 10, the total electricity usage from on-site Project construction related activities is estimated to be approximately 59,304 kWh.

TABLE 9: PROJECT CONSTRUCTION POWER COST

Land Use	Power Cost (per 1,000 SF of building per month of construction)	Total Building Size (1,000 SF)	Construction Duration (months)	Project Construction Power Cost
Affordable Housing	\$2.50	115.000	17	\$4,887.50
Parking	\$2.50	25.700	17	\$1,092.25
Other Asphalt Surfaces	\$2.50	63.000	17	\$2,677.50
TOTAL PROJECT CONSTRUCTION POWER COST				\$8,657.25

TABLE 10: PROJECT CONSTRUCTION ELECTRICITY USAGE

Land Use	Cost per kWh ¹	Project Construction Electricity Usage (kWh)
Affordable Housing	\$0.16	30,306
Parking	\$0.13	8,402
Other Asphalt Surfaces	\$0.13	20,596
TOTAL PROJECT CONSTRUCTION ELECTRICITY USAGE (kWh)		59,304

¹Assumes the Project will be under the GS-1 General Service Rate under Southern California Edison

CONSTRUCTION EQUIPMENT FUEL ESTIMATES

As presented in Table 11, Project construction activities would consume an estimated 44,668 gallons of diesel fuel. Project construction would represent a “single-event” diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

CONSTRUCTION WORKER FUEL ESTIMATES

With respect to estimated VMT, the construction worker trips would generate an estimated 516,354 VMT. Based on CalEEMod methodology, it is assumed that 50% of all vendor trips are from LDA, 25% are from LDT1, and 25% are from LDT2. Data regarding Project related construction worker trips were based on CalEEMod defaults for the land use type and project location which are also utilized within the air quality assessment and CalEEMod outputs contained herein.

As shown on Table 12, it is estimated that 18,027 gallons of fuel will be consumed related to construction worker trips during full construction of the proposed Project. Project construction worker trips would represent a “single-event” gasoline fuel demand and would not require on-going or permanent commitment of fuel resources for this purpose.

TABLE 11: PROJECT CONSTRUCTION EQUIPMENT FUEL CONSUMPTIONS ESTIMATES

Activity/Duration	Duration (Days)	Equipment	HP Rating	Quantity	Usage Hours	Load Factor	HP-hrs/day	Total Fuel Consumption
Site Preparation	5	Rubber Tired Dozers	367	3	8	0.4	3,523	952
		Crawler Tractors	84	4	8	0.37	995	269
		Graders	148	1	8	0.41	485	210
Grading	8	Excavators	36	1	8	0.38	109	47
		Crawler Tractors	84	3	8	0.37	746	323
		Rubber Tired Dozers	367	1	8	0.4	1,174	508
		Cranes	367	1	8	0.29	851	15,556
Building Construction	338	Forklifts	82	3	8	0.2	394	7,191
		Generator Sets	14	1	8	0.74	83	1,514
		Welders	46	1	8	0.45	166	3,026
		Tractors/Loaders/Backhoes	84	3	8	0.37	746	13,628
		Tractors/Loaders/Backhoes	84	1	8	0.37	249	242
		Cement and Mortar Mixers	10	2	8	0.56	90	87
Paving	18	Pavers	81	1	8	0.42	272	265
		Paving Equipment	89	2	8	0.36	513	499
		Rollers	36	2	8	0.38	219	213
Architectural Coating	18	Air Compressors	37	1	8	0.48	142	138
CONSTRUCTION FUEL DEMAND (GALLONS DIESEL FUEL)								44,668

TABLE 12: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Worker Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
2025	LDA						
	Site Preparation	5	9	18.5	833	32.49	26
	Grading	8	8	18.5	1,184	32.49	36
	Building Construction	230	40	18.5	170,200	32.49	5,238
	LDT1						
	Site Preparation	5	5	18.5	463	25.14	18
	Grading	8	4	18.5	592	25.14	24
	Building Construction	230	20	18.5	85,100	25.14	3,385
	LDT2						
	Site Preparation	5	5	18.5	463	25.29	18
	Grading	8	4	18.5	592	25.29	23
	Building Construction	230	20	18.5	85,100	25.29	3,365
2026	LDA						
	Building Construction	108	40	18.5	79,920	33.43	2,390
	Paving	18	10	18.5	3,330	33.43	100
	Architectural Coating	18	8	18.5	2,664	33.43	80
	LDT1						
	Building Construction	108	20	18.5	39,960	25.70	1,555
	Paving	18	5	18.5	1,665	25.70	65
	Architectural Coating	18	4	18.5	1,332	25.70	52
	LDT2						
	Building Construction	108	20	18.5	39,960	26.01	1,536
	Paving	18	5	18.5	1,665	26.01	64
	Architectural Coating	18	4	18.5	1,332	26.01	51
TOTAL CONSTRUCTION WORKER FUEL CONSUMPTION							18,027

CONSTRUCTION VENDOR/HAULING FUEL ESTIMATES

With respect to estimated VMT, the construction vendor trips would generate an estimated 41,371 VMT. It is assumed that 50% of all vendor trips are from medium-heavy duty trucks (MHDT), 50% of vendor trips are from heavy-heavy duty trucks (HHDT), and 100% of hauling trips are from HHDTs. As shown on Table 13, it is estimated that 5,703 gallons of fuel will be consumed

related to construction vendor trips (medium duty trucks) during full construction of the Project. Project construction vendor trips would represent a “single- event” diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

TABLE 13: CONSTRUCTION VENDOR/HAULING FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Vendor/ Hauling Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
2025	MHDT						
	Building Construction	230	6	10.2	14,076	8.60	1,637
	HHDT (Vendor)						
	Building Construction	230	6	10.2	14,076	6.22	2,264
2026	MHDT						
	Building Construction	108	6	10.2	6,610	8.72	758
	HHDT (Vendor)						
	Building Construction	108	6	10.2	6,610	6.33	1,045
TOTAL CONSTRUCTION VENDOR/HAULING FUEL CONSUMPTION							5,703

CONSTRUCTION ENERGY DEMANDS SUMMARY

Construction equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project’s proposed construction process that are unusual or energy-intensive, and Project construction equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

CCR Title 13, Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than 5 minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. Best Available Control Measures (BACMs) inform construction equipment operators of this requirement.

With regard to construction worker trips, the 2022 IEPR released by the CEC has shown that fuel efficiencies are getting better within on and off-road vehicle engines due to more stringent government requirements. As supported by the preceding discussions, Project construction energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

OPERATIONAL ENERGY DEMANDS

TRANSPORTATION ENERGY DEMANDS

Energy that would be consumed by Project-generated traffic is a function of total VMT and estimated vehicle fuel economies of vehicles accessing the Project site. The VMT per vehicle class can be determined by the vehicle fleet mix and the total VMT. As with worker and vendors trips, operational vehicle fuel efficiencies were estimated using information generated within

EMFAC2021 developed by CARB (31). As summarized on Table 14 the Project will result in a 3,183,391 annual VMT and an estimated annual fuel consumption of 128,569 gallons of fuel.

TABLE 14: PROJECT-GENERATED VEHICLE TRAFFIC ANNUAL FUEL CONSUMPTION

Vehicle Type	Average Vehicle Fuel Economy (mpg)	Annual VMT	Estimated Annual Fuel Consumption (gallons)
LDA	33.43	1,579,471	47,242
LDT1	25.70	120,912	4,704
LDT2	26.01	652,339	25,082
MDV	20.88	503,886	24,133
LHDT1	16.89	100,089	5,925
LHDT2	16.01	28,535	1,783
MHDT	8.72	46,659	5,348
HHDT	6.33	51,337	8,115
OBUS	6.71	1,917	286
UBUS	4.56	1,231	270
MCY	42.07	73,597	1,749
SBUS	6.43	4,258	662
MH	5.86	19,162	3,272
TOTAL (ALL VEHICLES)		3,183,391	128,569

OPERATIONAL ENERGY DEMANDS SUMMARY

The Project proposes conventional residential uses reflecting contemporary energy efficient/energy conserving designs and operational programs. The Project does not propose uses that are inherently energy intensive and the energy demands in total would be comparable to other residential land use projects of similar scale and configuration.

The Project will comply with the applicable Title 24 standards which will ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary.

The Project would not cause or result in the need for additional energy producing or transmission facilities. The Project would not engage in wasteful or inefficient uses of energy and aims to achieve energy conservation goals within the State of California. As supported by the preceding analyses, Project operations would not result in the inefficient, wasteful, or unnecessary consumption of energy.

PROJECT ENERGY DEMANDS

As shown in Table 15, the Project operational energy demands are estimated to result in 775,661 kWh/year of electricity and 1,866,725 kBtu/year of natural gas. Natural gas would be supplied to the Project by Southern California Gas; electricity would be supplied by Southern California Edison.

TABLE 15: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY

Land Use	Natural Gas Demand (kBtu/year)	Electricity Demand (kWh/year)
Affordable Housing	1,866,725	753,147
Parking	0	22,514
TOTAL PROJECT ENERGY DEMAND	1,866,725	775,661

OPERATIONAL ENERGY DEMANDS SUMMARY

The Project proposes residential uses reflecting contemporary energy efficient/energy conserving designs and operational programs. The Project does not propose uses that are inherently energy intensive and the energy demands in total would be comparable to other residential land use projects of similar scale and configuration.

The Project will comply with the applicable Title 24 standards which will ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary.

The Project would not cause or result in the need for additional energy producing or transmission facilities. The Project would not engage in wasteful or inefficient uses of energy and aims to achieve energy conservation goals within the State of California. As supported by the preceding analyses, Project operations would not result in the inefficient, wasteful, or unnecessary consumption of energy.

ENERGY IMPACT 1

Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?

Impact Analysis

A significant impact would occur if the proposed Project would result in the inefficient, wasteful, or unnecessary use of energy.

Construction

Based on CalEEMod estimations within the modeling output files used to estimate GHG emissions associated with future development projects under the General Plan, construction-related vehicle trips would result in approximately 557,725 VMT and consume an estimated 23,730 gallons of gasoline and diesel combined during future development projects construction phases. Additionally, on-site construction equipment would consume an estimated 44,668 gallons of diesel fuel. Limitations on idling of vehicles and equipment and requirements that equipment be properly maintained would result in fuel savings. California Code of Regulations, Title 13, Sections 2449 and 2485, limit idling from both on-road and off-road diesel-powered equipment and are enforced by the ARB. Additionally, given the cost of fuel, contractors and owners have a strong financial incentive to avoid wasteful, inefficient, and unnecessary consumption of energy during construction.

Due to the temporary nature of construction and the financial incentives for developers and contractors to use energy-consuming resources in an efficient manner, the construction phase of the proposed project would not result in wasteful, inefficient, and unnecessary consumption of energy. Therefore, the construction-related impacts related to electricity and fuel consumption would be less than significant.

Operation

Electricity and Natural Gas

Operation of the proposed project would consume energy as part of building operations and transportation activities. Building operations would involve energy consumption for multiple purposes including, but not limited to, building heating and cooling, refrigeration, lighting, and electronics. Based on CalEEMod energy use estimations, operations for the Project would result in approximately 775,661 kWh of electricity and 1,866,725 kBtu/year of natural gas annually.

Future development projects would be designed and constructed in accordance with the City's latest adopted energy efficiency standards, which are based on the California Title 24 energy efficiency standards. Title 24 standards include a broad set of energy conservation requirements that apply to the structural, mechanical, electrical, and plumbing systems in a building. For example, the Title 24 Lighting Power Density requirements define the maximum wattage of lighting that can be used in a building based on its square footage. Title 24 standards are widely regarded as the most advanced energy efficiency standards, would help reduce the amount of energy required for lighting, water heating, and heating and air conditioning in buildings and promote energy conservation.

Fuel

Operational energy would also be consumed during vehicle trips associated with future development projects envisioned under the proposed project. Fuel consumption would be primarily related to vehicle use by residents, visitors, and employees associated with future development projects. Based on CalEEMod energy use estimations, project-related vehicle trips would result in approximately 3,183,391 VMT and consume an estimated 128,569 gallons of gasoline and diesel combined, annually (see Attachment C).

The existing transportation facilities and infrastructure would provide future visitors and employees associated with the Project access to a mix of land uses in close proximity to the Project, thus further reducing fuel consumption demand. As such, operational-related transportation fuel consumption would not result in a significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources. Therefore, the operational impact related to vehicle fuel consumption would be less than significant.

ENERGY IMPACT 2

Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?

Impact Analysis

A significant impact would occur if the proposed Project would conflict with or obstruct a State or local plan for renewable energy or energy efficiency.

Construction

As discussed previously, the proposed project would result in energy consumption through the combustion of fossil fuels in construction vehicles, worker commute vehicles, and construction equipment, and the use of electricity for temporary buildings, lighting, and other sources. California Code of Regulations Title 13, Sections 2449 and 2485, limit idling from both on- road and off-road diesel-powered equipment and are enforced by the ARB. The proposed project would comply with these regulations. There are no policies at the local level applicable to energy conservation specific to the construction phase. Thus, it is anticipated that construction of the proposed project would not conflict with any applicable plan, policy, or regulation adopted for the purpose of reducing energy use or increasing the use of renewable energy. Therefore, construction-related energy efficiency and renewable energy standards consistency impacts would be less than significant.

Operation

California's Renewable Portfolio Standard (RPS) establishes a goal of renewable energy for local providers to be 44 percent by 2040. Similarly, the State is promoting renewable energy targets to meet the 2022 Scoping Plan greenhouse gas emissions reductions. As discussed in Section 5.1, above, the Project would result in approximately 775,661 kWh of electricity and 1,866,725 kBTU/year of natural gas annually.

Future development projects would be designed and constructed in accordance with the City's latest adopted energy efficiency standards, which are based on the California Title 24 energy efficiency standards. Title 24 standards include a broad set of energy conservation requirements that apply to the structural, mechanical, electrical, and plumbing systems in a building. For example, the Title 24 Lighting Power Density requirements define the maximum wattage of lighting that can be used in a building based on its square footage. Title 24 standards are widely regarded as the most advanced energy efficiency standards, would help reduce the amount of energy required for lighting, water heating, and heating and air conditioning in buildings and promote energy conservation.

Compliance with the aforementioned mandatory measures would ensure that future development projects would not conflict with any applicable plan, policy, or regulation adopted for the purpose of reducing energy use or increasing the use of renewable energy. Therefore, operational energy efficiency and renewable energy standards consistency impacts would be less than significant.

CONCLUSION

Results of the assessment indicate that the Project is not anticipated to result in any new impacts associated with air quality, greenhouse gas, and energy emissions.

REFERENCES

1. **South Coast Air Quality Management District.** Southern California Air Basins. [Online] <https://www.arb.ca.gov/msprog/onroad/porttruck/maps/scabc7map.pdf>.
2. **United States Environmental Protection Agency.** National Ambient Air Quality Standards (NAAQS). [Online] 1990. <https://www.epa.gov/environmental-topics/air-topics>.
3. **Environmental Protection Agency.** Air Pollution and the Clean Air Act. [Online] <http://www.epa.gov/air/caa/>.
4. **United States Environmental Protection Agency.** 1990 Clean Air Act Amendment Summary: Title I. [Online] <https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-i>.
5. —. 1990 Clean Air Act Amendment Summary: Title II. [Online] <https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-ii>.
6. **Air Resources Board.** California Ambient Air Quality Standards (CAAQS). [Online] 2009. [Cited: April 16, 2018.] <http://www.arb.ca.gov/research/aaqs/caaqs/caaqs.htm>.
7. **Environmental Protection Agency.** National Ambient Air Quality Standards (NAAQS). [Online] 1990. <https://www.epa.gov/environmental-topics/air-topics>.
8. **Southern California Association of Governments.** 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy. [Online] April 2016. <http://scagrtpscs.net/Documents/2016/final/f2016RTPSCS.pdf>.
9. **South Coast Air Quality Management District.** RULE 403. FUGITIVE DUST. [Online] <https://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-403.pdf?sfvrsn=4>.
10. —. RULE 1113. Architectural Coatings. [Online] <http://www.aqmd.gov/docs/default-source/rule-book/reg-xi/r1113.pdf>.
11. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] May 2023. www.caleemod.com.
12. **State of California.** *2020 CEQA California Environmental Quality Act.* 2020.
13. **South Coast Air Quality Management District (SCAQMD).** SCAQMD Air Quality Significance Thresholds. [Online] <https://www.aqmd.gov/docs/default-source/ceqa/handbook/south-coast-aqmd-air-quality-significance-thresholds.pdf>.
14. **California Air Pollution Control Officers Association (CAPCOA).** Appendix A: Calculation Details for CalEEMod. *CalEEMod*. [Online] http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6.
15. **State of California.** *2020 CEQA California Environmental Quality Act.* 2020.
16. **Institute of Transportation Engineers.** *Trip Generation Manual.* 11th Edition. 2021.
17. **South Coast Air Quality Management District.** *Localized Significance Thresholds Methodology.* s.l. : South Coast Air Quality Management District, 2003.

18. —. Final 2016 Air Quality Management Plan (AQMP). [Online] March 2017.
<http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf?sfvrsn=11>.
19. **Southern California Association of Governments.** 2020-2045 Regional Transportation Plan/Sustainable Communities Strategy. [Online] September 2020.
https://scag.ca.gov/sites/main/files/file-attachments/0903fconnectsocial-plan_0.pdf?1606001176.
20. **South Coast Air Quality Management District.** *CEQA Air Quality Handbook (1993)*. 1993.
21. **City of Corona.** Corona General Plan 2020-2040. [Online] 2020.
<https://www.coronaca.gov/home/showpublisheddocument/23728/63815704540477000>.
22. **Goss, Tracy A and Kroeger, Amy.** White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution. [Online] South Coast Air Quality Management District, 2003. http://www.aqmd.gov/rules/ciwg/final_white_paper.pdf.
23. **South Coast Air Quality Management District.** 2003 Air Quality Management Plan. [Online] 2003. <https://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/2003-aqmp>.
24. **Bay Area Air Quality Management District.** [Online] <http://www.baaqmd.gov/>.
25. **South Coast Air Quality Management District.** RULE 402 NUISANCE. [Online] <http://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-402.pdf>.
26. —. Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans. [Online] [http://www.aqmd.gov/docs/default-source/ceqa/handbook/greenhouse-gases-\(ghg\)-ceqa-significance-thresholds/ghgboardsynopsis.pdf?sfvrsn=2](http://www.aqmd.gov/docs/default-source/ceqa/handbook/greenhouse-gases-(ghg)-ceqa-significance-thresholds/ghgboardsynopsis.pdf?sfvrsn=2).
27. —. Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans. [Online] <http://www.aqmd.gov/hb/2008/December/081231a.htm>.
28. **Lawrence Berkeley National Laboratory.** California's Policies Can Significantly Cut Greenhouse Gas Emissions through 2030. *Lawrence Berkeley National Laboratory*. [Online] January 22, 2015. <http://newscenter.lbl.gov/2015/01/22/californias-policies-can-significantly-cut-greenhouse-gas-emissions-2030/>.
29. **State of California.** *California Environmental Quality Act Guideline, California Public Resources Code, Title 14, Division 6, Chapter 3,*
30. **Association of Environmental Professionals.** *2019 CEQA California Environmental Quality Act*. 2019.
31. **California Department of Transportation.** EMFAC Software. [Online] <http://www.dot.ca.gov/hq/env/air/pages/emfac.htm>.
32. **Pray, Richard.** *2023 National Construction Estimator*. Carlsbad : Craftsman Book Company, 2023.

ATTACHMENT A
CALEEMOD PROPOSED PROJECT EMISSIONS MODEL OUTPUTS

15669 - Second Street Family Detailed Report

Table of Contents

1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
3. Construction Emissions Details
 - 3.1. Site Preparation (2025) - Unmitigated
 - 3.3. Grading (2025) - Unmitigated
 - 3.5. Building Construction (2025) - Unmitigated
 - 3.7. Building Construction (2026) - Unmitigated

3.9. Paving (2026) - Unmitigated

3.11. Architectural Coating (2026) - Unmitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	15669 - Second Street Family
Construction Start Date	1/31/2025
Operational Year	2026
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.60
Precipitation (days)	19.2
Location	33.88043, -117.577918
County	Riverside-South Coast
City	Corona
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5466
EDFZ	11
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.19

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
------------------	------	------	-------------	-----------------------	------------------------	--------------------------------	------------	-------------

Apartments Low Rise	110	Dwelling Unit	1.44	115,000	34,200	—	355	—
Parking Lot	159	Space	0.59	0.00	0.00	—	—	—
Other Asphalt Surfaces	63.0	1000sqft	1.45	0.00	0.00	—	—	—

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.12	43.9	20.1	34.4	0.05	0.76	1.60	2.36	0.70	0.38	1.08	—	6,346	6,346	0.25	0.14	6.34	6,402
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.67	3.93	35.8	31.8	0.05	1.81	5.89	7.70	1.66	2.74	4.40	—	5,519	5,519	0.23	0.12	0.13	5,540
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.28	2.53	8.57	12.9	0.02	0.34	0.84	1.19	0.32	0.23	0.54	—	2,684	2,684	0.11	0.07	1.41	2,710
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.23	0.46	1.56	2.36	< 0.005	0.06	0.15	0.22	0.06	0.04	0.10	—	444	444	0.02	0.01	0.23	449

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	1.89	1.58	12.1	20.4	0.03	0.47	1.14	1.61	0.43	0.27	0.70	—	4,106	4,106	0.16	0.12	5.12	4,150
2026	3.12	43.9	20.1	34.4	0.05	0.76	1.60	2.36	0.70	0.38	1.08	—	6,346	6,346	0.25	0.14	6.34	6,402
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	4.67	3.93	35.8	31.8	0.05	1.81	5.89	7.70	1.66	2.74	4.40	—	5,519	5,519	0.23	0.12	0.13	5,540
2026	1.75	1.48	11.4	18.5	0.03	0.41	1.14	1.55	0.38	0.27	0.65	—	3,988	3,988	0.13	0.12	0.12	4,026
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	1.28	1.08	8.57	12.9	0.02	0.34	0.84	1.19	0.32	0.23	0.54	—	2,684	2,684	0.11	0.07	1.41	2,710
2026	0.59	2.53	3.84	6.25	0.01	0.14	0.36	0.50	0.13	0.08	0.21	—	1,300	1,300	0.04	0.04	0.63	1,313
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.23	0.20	1.56	2.36	< 0.005	0.06	0.15	0.22	0.06	0.04	0.10	—	444	444	0.02	0.01	0.23	449
2026	0.11	0.46	0.70	1.14	< 0.005	0.03	0.07	0.09	0.02	0.02	0.04	—	215	215	0.01	0.01	0.11	217

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	6.94	8.91	7.88	58.8	0.15	0.28	11.4	11.7	0.28	2.90	3.17	52.4	17,073	17,125	5.93	0.61	47.3	17,503
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	6.00	8.00	8.22	44.0	0.14	0.28	11.4	11.7	0.28	2.90	3.17	52.4	16,243	16,296	5.94	0.63	1.94	16,634

Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.55	5.88	3.90	28.7	0.07	0.10	6.10	6.21	0.10	1.55	1.65	52.4	8,402	8,455	5.67	0.36	11.6	8,714
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.65	1.07	0.71	5.24	0.01	0.02	1.11	1.13	0.02	0.28	0.30	8.67	1,391	1,400	0.94	0.06	1.92	1,443

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	6.08	5.55	5.52	51.6	0.13	0.10	11.4	11.5	0.09	2.90	2.99	—	13,374	13,374	0.50	0.58	46.6	13,605
Area	0.80	3.33	1.88	7.01	0.01	0.15	—	0.15	0.15	—	0.15	0.00	2,333	2,333	0.04	< 0.005	—	2,335
Energy	0.06	0.03	0.47	0.20	< 0.005	0.04	—	0.04	0.04	—	0.04	—	1,334	1,334	0.12	0.01	—	1,340
Water	—	—	—	—	—	—	—	—	—	—	—	8.57	32.2	40.8	0.88	0.02	—	69.2
Waste	—	—	—	—	—	—	—	—	—	—	—	43.8	0.00	43.8	4.38	0.00	—	153
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.74	0.74
Total	6.94	8.91	7.88	58.8	0.15	0.28	11.4	11.7	0.28	2.90	3.17	52.4	17,073	17,125	5.93	0.61	47.3	17,503
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	5.73	5.20	5.92	43.0	0.12	0.10	11.4	11.5	0.09	2.90	2.99	—	12,561	12,561	0.52	0.60	1.21	12,753
Area	0.21	2.78	1.82	0.78	0.01	0.15	—	0.15	0.15	—	0.15	0.00	2,316	2,316	0.04	< 0.005	—	2,319
Energy	0.06	0.03	0.47	0.20	< 0.005	0.04	—	0.04	0.04	—	0.04	—	1,334	1,334	0.12	0.01	—	1,340
Water	—	—	—	—	—	—	—	—	—	—	—	8.57	32.2	40.8	0.88	0.02	—	69.2
Waste	—	—	—	—	—	—	—	—	—	—	—	43.8	0.00	43.8	4.38	0.00	—	153
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.74	0.74

Total	6.00	8.00	8.22	44.0	0.14	0.28	11.4	11.7	0.28	2.90	3.17	52.4	16,243	16,296	5.94	0.63	1.94	16,634
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	3.08	2.79	3.27	24.2	0.07	0.05	6.10	6.16	0.05	1.55	1.60	—	6,866	6,866	0.28	0.33	10.9	6,981
Area	0.41	3.06	0.17	4.33	< 0.005	0.01	—	0.01	0.01	—	0.01	0.00	170	170	< 0.005	< 0.005	—	170
Energy	0.06	0.03	0.47	0.20	< 0.005	0.04	—	0.04	0.04	—	0.04	—	1,334	1,334	0.12	0.01	—	1,340
Water	—	—	—	—	—	—	—	—	—	—	—	8.57	32.2	40.8	0.88	0.02	—	69.2
Waste	—	—	—	—	—	—	—	—	—	—	—	43.8	0.00	43.8	4.38	0.00	—	153
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.74	0.74
Total	3.55	5.88	3.90	28.7	0.07	0.10	6.10	6.21	0.10	1.55	1.65	52.4	8,402	8,455	5.67	0.36	11.6	8,714
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.56	0.51	0.60	4.41	0.01	0.01	1.11	1.12	0.01	0.28	0.29	—	1,137	1,137	0.05	0.05	1.80	1,156
Area	0.08	0.56	0.03	0.79	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	28.2	28.2	< 0.005	< 0.005	—	28.2
Energy	0.01	0.01	0.09	0.04	< 0.005	0.01	—	0.01	0.01	—	0.01	—	221	221	0.02	< 0.005	—	222
Water	—	—	—	—	—	—	—	—	—	—	—	1.42	5.33	6.75	0.15	< 0.005	—	11.5
Waste	—	—	—	—	—	—	—	—	—	—	—	7.25	0.00	7.25	0.72	0.00	—	25.4
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.12	0.12
Total	0.65	1.07	0.71	5.24	0.01	0.02	1.11	1.13	0.02	0.28	0.30	8.67	1,391	1,400	0.94	0.06	1.92	1,443

3. Construction Emissions Details

3.1. Site Preparation (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	4.59	3.85	35.7	30.8	0.05	1.81	—	1.81	1.66	—	1.66	—	5,292	5,292	0.21	0.04	—	5,310
Dust From Material Movement:	—	—	—	—	—	—	5.66	5.66	—	2.69	2.69	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.49	0.42	< 0.005	0.02	—	0.02	0.02	—	0.02	—	72.5	72.5	< 0.005	< 0.005	—	72.7
Dust From Material Movement:	—	—	—	—	—	—	0.08	0.08	—	0.04	0.04	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.09	0.08	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.0	12.0	< 0.005	< 0.005	—	12.0
Dust From Material Movement:	—	—	—	—	—	—	0.01	0.01	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.08	1.02	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	227	227	0.01	0.01	0.02	230
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.15	3.15	< 0.005	< 0.005	0.01	3.19
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.52	0.52	< 0.005	< 0.005	< 0.005	0.53
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.56	2.15	19.3	18.4	0.03	1.05	—	1.05	0.97	—	0.97	—	2,957	2,957	0.12	0.02	—	2,967

Dust From Material Movement:	—	—	—	—	—	—	2.26	2.26	—	0.94	0.94	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.42	0.40	< 0.005	0.02	—	0.02	0.02	—	0.02	—	64.8	64.8	< 0.005	< 0.005	—	65.0
Dust From Material Movement:	—	—	—	—	—	—	0.05	0.05	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.08	0.07	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	10.7	10.7	< 0.005	< 0.005	—	10.8
Dust From Material Movement:	—	—	—	—	—	—	0.01	0.01	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.07	0.88	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	194	194	0.01	0.01	0.02	197
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	4.31	4.31	< 0.005	< 0.005	0.01	4.37
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.71	0.71	< 0.005	< 0.005	< 0.005	0.72
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Building Construction (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.45	1.21	11.3	14.1	0.03	0.47	—	0.47	0.43	—	0.43	—	2,630	2,630	0.11	0.02	—	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.45	1.21	11.3	14.1	0.03	0.47	—	0.47	0.43	—	0.43	—	2,630	2,630	0.11	0.02	—	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.91	0.77	7.13	8.91	0.02	0.29	—	0.29	0.27	—	0.27	—	1,658	1,658	0.07	0.01	—	1,663
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.17	0.14	1.30	1.63	< 0.005	0.05	—	0.05	0.05	—	0.05	—	274	274	0.01	< 0.005	—	275
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.43	0.35	0.35	6.12	0.00	0.00	1.04	1.04	0.00	0.24	0.24	—	1,116	1,116	0.05	0.04	4.10	1,133
Vendor	0.02	0.01	0.39	0.12	< 0.005	0.01	0.10	0.11	0.01	0.03	0.03	—	360	360	0.01	0.05	1.02	377
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.37	0.33	0.38	4.62	0.00	0.00	1.04	1.04	0.00	0.24	0.24	—	1,026	1,026	0.05	0.04	0.11	1,039
Vendor	0.02	0.01	0.41	0.13	< 0.005	0.01	0.10	0.11	0.01	0.03	0.03	—	360	360	0.01	0.05	0.03	377
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.23	0.21	0.26	3.08	0.00	0.00	0.64	0.64	0.00	0.15	0.15	—	655	655	0.03	0.02	1.11	664
Vendor	0.01	< 0.005	0.26	0.08	< 0.005	< 0.005	0.06	0.07	< 0.005	0.02	0.02	—	227	227	< 0.005	0.03	0.28	237
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.05	0.56	0.00	0.00	0.12	0.12	0.00	0.03	0.03	—	108	108	0.01	< 0.005	0.18	110
Vendor	< 0.005	< 0.005	0.05	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	37.5	37.5	< 0.005	0.01	0.05	39.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.38	1.16	10.7	14.1	0.03	0.41	—	0.41	0.38	—	0.38	—	2,630	2,630	0.11	0.02	—	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.38	1.16	10.7	14.1	0.03	0.41	—	0.41	0.38	—	0.38	—	2,630	2,630	0.11	0.02	—	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.41	0.34	3.17	4.18	0.01	0.12	—	0.12	0.11	—	0.11	—	782	782	0.03	0.01	—	785
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.58	0.76	< 0.005	0.02	—	0.02	0.02	—	0.02	—	130	130	0.01	< 0.005	—	130
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.37	0.34	0.31	5.69	0.00	0.00	1.04	1.04	0.00	0.24	0.24	—	1,092	1,092	0.05	0.04	3.70	1,108
Vendor	0.02	0.01	0.38	0.12	< 0.005	0.01	0.10	0.11	0.01	0.03	0.03	—	354	354	0.01	0.05	0.97	371
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.36	0.32	0.35	4.31	0.00	0.00	1.04	1.04	0.00	0.24	0.24	—	1,004	1,004	0.02	0.04	0.10	1,017
Vendor	0.02	0.01	0.39	0.12	< 0.005	0.01	0.10	0.11	0.01	0.03	0.03	—	354	354	0.01	0.05	0.03	371
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.11	0.09	0.11	1.34	0.00	0.00	0.30	0.30	0.00	0.07	0.07	—	303	303	< 0.005	0.01	0.48	307
Vendor	< 0.005	< 0.005	0.12	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	105	105	< 0.005	0.02	0.12	110
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.24	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	50.1	50.1	< 0.005	< 0.005	0.08	50.8
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	17.4	17.4	< 0.005	< 0.005	0.02	18.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.99	0.83	7.46	10.4	0.02	0.31	—	0.31	0.28	—	0.28	—	1,598	1,598	0.06	0.01	—	1,604
Paving	—	0.30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.37	0.51	< 0.005	0.02	—	0.02	0.01	—	0.01	—	78.8	78.8	< 0.005	< 0.005	—	79.1
Paving	—	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	13.0	13.0	< 0.005	< 0.005	—	13.1
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.08	0.08	1.44	0.00	0.00	0.26	0.26	0.00	0.06	0.06	—	276	276	0.01	0.01	0.93	280
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.06	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	12.7	12.7	< 0.005	< 0.005	0.02	12.8
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.10	2.10	< 0.005	< 0.005	< 0.005	2.13
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.16	1.14	1.51	< 0.005	0.03	—	0.03	0.03	—	0.03	—	178	178	0.01	< 0.005	—	179
Architectural Coatings	—	41.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.06	0.07	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	8.78	8.78	< 0.005	< 0.005	—	8.81
Architectural Coatings	—	2.02	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.45	1.45	< 0.005	< 0.005	—	1.46	
Architectural Coatings	—	0.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Worker	0.07	0.07	0.06	1.14	0.00	0.00	0.21	0.21	0.00	0.05	0.05	—	218	218	0.01	0.01	0.74	222	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	10.0	10.0	< 0.005	< 0.005	0.02	10.2	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.66	1.66	< 0.005	< 0.005	< 0.005	1.68	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	6.08	5.55	5.52	51.6	0.13	0.10	11.4	11.5	0.09	2.90	2.99	—	13,374	13,374	0.50	0.58	46.6	13,605
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	6.08	5.55	5.52	51.6	0.13	0.10	11.4	11.5	0.09	2.90	2.99	—	13,374	13,374	0.50	0.58	46.6	13,605
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	5.73	5.20	5.92	43.0	0.12	0.10	11.4	11.5	0.09	2.90	2.99	—	12,561	12,561	0.52	0.60	1.21	12,753
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	5.73	5.20	5.92	43.0	0.12	0.10	11.4	11.5	0.09	2.90	2.99	—	12,561	12,561	0.52	0.60	1.21	12,753
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Apartme Low Rise	0.56	0.51	0.60	4.41	0.01	0.01	1.11	1.12	0.01	0.28	0.29	—	1,137	1,137	0.05	0.05	1.80	1,156
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.56	0.51	0.60	4.41	0.01	0.01	1.11	1.12	0.01	0.28	0.29	—	1,137	1,137	0.05	0.05	1.80	1,156

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	—	714	714	0.07	0.01	—	719
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	21.4	21.4	< 0.005	< 0.005	—	21.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	736	736	0.07	0.01	—	740
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	—	714	714	0.07	0.01	—	719

Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	21.4	21.4	< 0.005	< 0.005	—	21.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	736	736	0.07	0.01	—	740
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	—	118	118	0.01	< 0.005	—	119
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	3.54	3.54	< 0.005	< 0.005	—	3.56
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	122	122	0.01	< 0.005	—	123

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	0.06	0.03	0.47	0.20	< 0.005	0.04	—	0.04	0.04	—	0.04	—	598	598	0.05	< 0.005	—	600
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.06	0.03	0.47	0.20	< 0.005	0.04	—	0.04	0.04	—	0.04	—	598	598	0.05	< 0.005	—	600

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	0.06	0.03	0.47	0.20	< 0.005	0.04	—	0.04	0.04	—	0.04	—	598	598	0.05	< 0.005	—	600
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.06	0.03	0.47	0.20	< 0.005	0.04	—	0.04	0.04	—	0.04	—	598	598	0.05	< 0.005	—	600
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	0.01	0.01	0.09	0.04	< 0.005	0.01	—	0.01	0.01	—	0.01	—	99.0	99.0	0.01	< 0.005	—	99.3
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	0.01	0.09	0.04	< 0.005	0.01	—	0.01	0.01	—	0.01	—	99.0	99.0	0.01	< 0.005	—	99.3

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.21	0.11	1.82	0.78	0.01	0.15	—	0.15	0.15	—	0.15	0.00	2,316	2,316	0.04	< 0.005	—	2,319

Consumer	—	2.47	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.20	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.58	0.55	0.06	6.24	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	16.7	16.7	< 0.005	< 0.005	—	16.7
Total	0.80	3.33	1.88	7.01	0.01	0.15	—	0.15	0.15	—	0.15	0.00	2,333	2,333	0.04	< 0.005	—	2,335
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.21	0.11	1.82	0.78	0.01	0.15	—	0.15	0.15	—	0.15	0.00	2,316	2,316	0.04	< 0.005	—	2,319
Consumer Products	—	2.47	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.20	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.21	2.78	1.82	0.78	0.01	0.15	—	0.15	0.15	—	0.15	0.00	2,316	2,316	0.04	< 0.005	—	2,319
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	26.3	26.3	< 0.005	< 0.005	—	26.3
Consumer Products	—	0.45	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.07	0.07	0.01	0.78	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.89	1.89	< 0.005	< 0.005	—	1.90
Total	0.08	0.56	0.03	0.79	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	28.2	28.2	< 0.005	< 0.005	—	28.2

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	8.57	32.2	40.8	0.88	0.02	—	69.2
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	8.57	32.2	40.8	0.88	0.02	—	69.2
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	8.57	32.2	40.8	0.88	0.02	—	69.2
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	8.57	32.2	40.8	0.88	0.02	—	69.2
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	1.42	5.33	6.75	0.15	< 0.005	—	11.5

Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.42	5.33	6.75	0.15	< 0.005	—	11.5

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	43.8	0.00	43.8	4.38	0.00	—	153
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	43.8	0.00	43.8	4.38	0.00	—	153
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	43.8	0.00	43.8	4.38	0.00	—	153
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00

Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	43.8	0.00	43.8	4.38	0.00	—	153
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	7.25	0.00	7.25	0.72	0.00	—	25.4
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	7.25	0.00	7.25	0.72	0.00	—	25.4

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.74	0.74
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.74	0.74
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.74	0.74
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.74	0.74
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Low Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.12	0.12
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.12	0.12

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e	
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Sequest	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Remove d	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	1/27/2025	1/31/2025	5.00	5.00	5
Grading	Grading	2/3/2025	2/12/2025	5.00	8.00	8
Building Construction	Building Construction	2/13/2025	6/1/2026	5.00	338	230
Paving	Paving	5/7/2026	6/1/2026	5.00	18.0	18
Architectural Coating	Architectural Coating	5/7/2026	6/1/2026	5.00	18.0	18

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	3.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Average	4.00	8.00	84.0	0.37
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Crawler Tractors	Diesel	Average	3.00	8.00	84.0	0.37
Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40

Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	1.00	8.00	14.0	0.74
Building Construction	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction	Tractors/Loaders/Backhoes	Diesel	Average	3.00	8.00	84.0	0.37
Paving	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Paving	Cement and Mortar Mixers	Diesel	Average	2.00	8.00	10.0	0.56
Paving	Pavers	Diesel	Average	1.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	2.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	1.00	8.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	17.5	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	—	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	15.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	—	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT

Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	79.2	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	11.8	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	20.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	15.8	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	232,875	77,625	0.00	0.00	3,740

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Site Preparation	—	—	17.5	0.00	—
Grading	—	—	20.0	0.00	—
Paving	0.00	0.00	0.00	0.00	2.04

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Apartments Low Rise	—	0%
Parking Lot	0.59	100%
Other Asphalt Surfaces	1.45	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2025	0.00	349	0.03	< 0.005
2026	0.00	346	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Apartments Low Rise	529	1,320	1,038	260,918	6,455	16,105	12,669	3,183,391
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

Hearth Type	Unmitigated (number)
Apartments Low Rise	—
Wood Fireplaces	0
Gas Fireplaces	110
Propane Fireplaces	0
Electric Fireplaces	0
No Fireplaces	0

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
232875	77,625	0.00	0.00	3,740

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00

Summer Days	day/yr	250
-------------	--------	-----

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Apartments Low Rise	753,147	346	0.0330	0.0040	1,866,725
Parking Lot	22,514	346	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	346	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Apartments Low Rise	4,474,115	662,769
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Apartments Low Rise	81.3	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Apartments Low Rise	Average room A/C & Other residential A/C and heat pumps	User Defined	750	< 0.005	2.50	2.50	10.0
Apartments Low Rise	Household refrigerators and/or freezers	R-134a	1,430	0.12	0.60	0.00	1.00

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
----------------	-----------	-------------	----------------	---------------	------------	-------------

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
----------------	-----------	----------------	---------------	----------------	------------	-------------

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
----------------	-----------	--------	--------------------------	------------------------------	------------------------------

5.17. User Defined

Equipment Type	Fuel Type
----------------	-----------

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
--------------------------	----------------------	---------------	-------------

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres
--------------------	---------------	-------------

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
-----------	--------	------------------------------	------------------------------

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	16.3	annual days of extreme heat
Extreme Precipitation	3.50	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	17.3	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	2	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	2	1	1	3
Extreme Precipitation	N/A	N/A	N/A	N/A

Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	80.0
AQ-PM	90.9
AQ-DPM	98.6
Drinking Water	73.7
Lead Risk Housing	96.3
Pesticides	0.00
Toxic Releases	67.1
Traffic	92.9
Effect Indicators	—

CleanUp Sites	38.8
Groundwater	54.5
Haz Waste Facilities/Generators	54.6
Impaired Water Bodies	12.5
Solid Waste	12.9
Sensitive Population	—
Asthma	40.3
Cardio-vascular	84.5
Low Birth Weights	48.8
Socioeconomic Factor Indicators	—
Education	93.7
Housing	85.3
Linguistic	81.4
Poverty	86.1
Unemployment	75.4

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	7.468240729
Employed	41.16514821
Median HI	12.56255614
Education	—
Bachelor's or higher	5.248299756
High school enrollment	100
Preschool enrollment	10.36827922

Transportation	—
Auto Access	17.73386372
Active commuting	66.08494803
Social	—
2-parent households	13.48646221
Voting	1.873476197
Neighborhood	—
Alcohol availability	11.13820095
Park access	81.35506224
Retail density	67.80443988
Supermarket access	66.40574875
Tree canopy	18.33696907
Housing	—
Homeownership	16.46349288
Housing habitability	10.714744
Low-inc homeowner severe housing cost burden	25.38175286
Low-inc renter severe housing cost burden	37.61067625
Uncrowded housing	2.938534582
Health Outcomes	—
Insured adults	3.118182985
Arthritis	49.4
Asthma ER Admissions	66.1
High Blood Pressure	49.4
Cancer (excluding skin)	91.6
Asthma	9.8
Coronary Heart Disease	37.1
Chronic Obstructive Pulmonary Disease	17.9

Diagnosed Diabetes	16.9
Life Expectancy at Birth	47.1
Cognitively Disabled	54.2
Physically Disabled	67.1
Heart Attack ER Admissions	16.3
Mental Health Not Good	4.6
Chronic Kidney Disease	20.1
Obesity	2.6
Pedestrian Injuries	88.0
Physical Health Not Good	5.3
Stroke	29.9
Health Risk Behaviors	—
Binge Drinking	66.7
Current Smoker	4.8
No Leisure Time for Physical Activity	3.1
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	10.6
Elderly	94.7
English Speaking	21.8
Foreign-born	82.8
Outdoor Workers	21.1
Climate Change Adaptive Capacity	—
Impervious Surface Cover	46.4
Traffic Density	88.3
Traffic Access	23.0

Other Indices	—
Hardship	94.3
Other Decision Support	—
2016 Voting	15.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	93.0
Healthy Places Index Score for Project Location (b)	5.00
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	Yes
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Based on client provided data
Construction: Construction Phases	Taken from client data, Building, Paving, and Architectural Coating overlap to present a conservative analysis

Construction: Off-Road Equipment	T/L/B replaced with Crawler Tractor to accurately calculate disturbance for Site Preparation and Grading phases. Standard 8 hours work days
Construction: Architectural Coatings	SCAQMD Rule 1113
Operations: Hearths	SCAQMD Rule 445 no wood burning devices. Wood burning devices added to gas devices.
Operations: Architectural Coatings	SCAQMD Rule 1113
Operations: Refrigerants	Beginning 1 January 2025, all new air conditioning equipment may not use refrigerants with a GWP of 750 or greater.
Operations: Vehicle Data	Trip characteristics taken from ITE

ATTACHMENT B
CAP SCREENING TABLES

GREENHOUSE GAS EMISSIONS SCREENING TABLES

Table 1: Screening Table for GHG Reduction Measures for Residential Development

Feature	Description	Assigned Point Values	Project Points
Reduction Measure 2.1: Exceed Energy Efficiency Standards in New Residential Units			
2.1.A Building Envelope			
2.1.A.1 Insulation	<ul style="list-style-type: none"> 2016 Title 24 Requirements (walls R-13, roof/attic R-30) Modestly Enhanced Insulation (walls R-15, roof/attic R-38) Enhanced Insulation (rigid wall insulation R-13, roof/attic R-38) Greatly Enhanced Insulation (spray foam wall insulated walls R-18 or higher, roof/attic R-38 or higher) 	0 points 7 points 9 points 11 points	7
2.1.A.2 Windows	<ul style="list-style-type: none"> 2016 Title 24 Windows (0.57 U-factor, 0.4 solar heat gain coefficient [SHGC]) Modestly Enhanced Window (0.4 U-Factor, 0.32 SHGC) Enhanced Window (0.32 U-Factor, 0.25 SHGC) Greatly Enhanced Window (0.28 or less U-Factor, 0.22 or less SHGC) 	0 points 3 points 4 points 5 points	4
2.1.A.3 Cool Roofs	<ul style="list-style-type: none"> Modest Cool Roof (CRRC Rated 0.15 aged solar reflectance, 0.75 thermal emittance) Enhanced Cool Roof (CRRC Rated 0.2 aged solar reflectance, 0.75 thermal emittance) Greatly Enhanced Cool Roof (CRRC Rated 0.35 aged solar reflectance, 0.75 thermal emittance) 	6 points 7 points 8 points	6
2.1.A.4 Air Infiltration	Minimizing leaks in the building envelope is as important as the insulation properties of the building. Insulation does not work effectively if there is excess air leakage. <ul style="list-style-type: none"> Air barrier applied to exterior walls, caulking, and visual inspection such as the HERS Verified Quality Insulation Installation (QII or equivalent) Blower Door HERS Verified Envelope Leakage or equivalent 	6 points 5 points	
2.1.A.5 Thermal Storage of Building	Thermal storage is a design characteristic that helps keep a constant temperature in the building. Common thermal storage devices include strategically placed water filled columns, water storage tanks, and thick masonry walls. <ul style="list-style-type: none"> Modest Thermal Mass (10% of floor or 10% of walls 12" or more thick exposed concrete or masonry with no permanently installed floor covering such as carpet, linoleum, wood, or other insulating materials) Enhanced Thermal Mass (20% of floor or 20% of walls 12" or more thick exposed concrete or masonry with no permanently installed floor covering such as carpet, linoleum, wood, or other insulating materials) 	1 point 2 points	
2.1.B Indoor Space Efficiencies			
2.1.B.1 Heating/Cooling Distribution System	<ul style="list-style-type: none"> Minimum Duct Insulation (R-4.2 required) Modest Duct insulation (R-6) Enhanced Duct Insulation (R-8) Distribution loss reduction with inspection (HERS Verified Duct Leakage or equivalent) 	0 points 4 points 5 points 7 points	4
2.1.B.2 Space Heating/Cooling Equipment	<ul style="list-style-type: none"> 2016 Title 24 Minimum HVAC Efficiency (SEER 13/75% AFUE or 7.7 HSPF) Improved Efficiency HVAC (SEER 14/78% AFUE or 8 HSPF) High Efficiency HVAC (SEER 15/80% AFUE or 8.5 HSPF) Very High Efficiency HVAC (SEER 16/82% AFUE or 9 HSPF) 	0 points 2 points 4 points 5 points	4
2.1.B.3 Water Heaters	<ul style="list-style-type: none"> 2016 Title 24 Minimum Efficiency (0.57 Energy Factor) Improved Efficiency Water Heater (0.675 Energy Factor) High Efficiency Water Heater (0.72 Energy Factor) Very High Efficiency Water Heater (0.92 Energy Factor) Solar Pre-heat System (0.2 Net Solar Fraction) Enhanced Solar Pre-heat System (0.35 Net Solar Fraction) 	0 points 7 points 9 points 11 points 2 points 5 points	9

GREENHOUSE GAS EMISSIONS SCREENING TABLES

Feature	Description	Assigned Point Values	Project Points
2.1.B.4 Daylighting	Daylighting is the ability of each room within the building to provide outside light during the day reducing the need for artificial lighting during daylight hours. <ul style="list-style-type: none"> All peripheral rooms within the living space have at least one window (required) All rooms within the living space have daylight (through use of windows, solar tubes, skylights, etc.) All rooms daylighted 	0 points 1 point 1 point	
2.1.B.5 Artificial Lighting	<ul style="list-style-type: none"> Efficient Lights (25% of in-unit fixtures considered high efficacy. High efficiency is defined as 40 lumens/watt for 15 watt or less fixtures; 50 lumens/watt for 15-40 watt fixtures, 60 lumens/watt for fixtures >40watt) High Efficiency Lights (50% of in-unit fixtures are high efficiency) Very High Efficiency Lights (100% of in-unit fixtures are high efficiency) 	5 points 6 points 7 points	7
2.1.B.6 Appliances	<ul style="list-style-type: none"> Energy Star Refrigerator (new) Energy Star Dishwasher (new) Energy Star Washing Machine (new) 	1 point 1 point 1 point	1
2.1.C Miscellaneous Residential Building Efficiencies			
2.1.C.1 Building Placement	North/south alignment of building or other building placement such that the orientation of the buildings optimizes natural heating, cooling, and lighting.	3 points	
2.1.C.2 Shading	At least 90% of south-facing glazing will be shaded by vegetation or overhangs at noon on June 21 st .	2 points	
2.1.C.3 Energy Star Homes	EPA Energy Star for Homes (version 3 or above)	15 points	
2.1.C.4 Independent Energy Efficiency Calculations	Provide point values based upon energy efficiency modeling of the project. Note that engineering data will be required documenting the energy efficiency and point values based upon the proven efficiency beyond Title 24 Energy Efficiency Standards.	TBD	
2.1.C.5 Other	This allows innovation by the applicant to provide design features that increase the energy efficiency of the project not provided in the table. Note that engineering data will be required documenting the energy efficiency of innovative designs and point values given based upon the proven efficiency beyond Title 24 Energy Efficiency Standards.	TBD	
2.1.C.6 Existing Residential Retrofits	<p>Having residential developments within walking and biking distances of local retail helps to reduce vehicle trips and/or vehicle miles traveled.</p> <p>The point value of residential projects in close proximity to local retail will be determined based upon traffic studies that demonstrate trip reductions and/or reductions in vehicle miles traveled (VMT).</p> <p>The suburban project will have at least three of the following on site and/or off site within ¼-mile: Residential Development, Retail Development, Park, Open Space, or Office.</p> <p>The mixed-use development should encourage walking and other non-auto modes of transport from residential to office/commercial locations (and vice versa). The project should minimize the need for external trips by including services/facilities for daycare, banking/ATM, restaurants, vehicle refueling, and shopping.</p>	TBD	

GREENHOUSE GAS EMISSIONS SCREENING TABLES

Feature	Description	Assigned Point Values	Project Points
Reduction Measure 9.1: Clean Energy			
9.1.A Residential Renewable Energy Generation			
9.1.A.1 Photovoltaic	<p>Solar Photovoltaic panels installed on individual homes or in collective neighborhood arrangements such that the total power provided augments:</p> <ul style="list-style-type: none"> 30 percent of the power needs of the project 40 percent of the power needs of the project 50 percent of the power needs of the project 60 percent of the power needs of the project 70 percent of the power needs of the project 80 percent of the power needs of the project 90 percent of the power needs of the project 100 percent of the power needs of the project 	<p>9 points 12 points 17 points 20 points 23 points 25 points 28 points 31 points</p>	9
9.1.A.2 Wind Turbines	<p>Some areas of the City lend themselves to wind turbine applications. Analysis of the areas' capability to support wind turbines should be evaluated prior to choosing this feature. Individual wind turbines at homes or collective neighborhood arrangements of wind turbines such that the total power provided augments:</p> <ul style="list-style-type: none"> 30 percent of the power needs of the project 40 percent of the power needs of the project 50 percent of the power needs of the project 60 percent of the power needs of the project 70 percent of the power needs of the project 80 percent of the power needs of the project 90 percent of the power needs of the project 100 percent of the power needs of the project 	<p>9 points 12 points 17 points 21 points 23 points 25 points 28 points 31 points</p>	
9.1.A.3 Off-site Renewable Energy Project	<p>The applicant may submit a proposal to supply an off-site renewable energy project such as renewable energy retrofits of existing homes. These off-site renewable energy retrofit project proposals will be determined on a case-by-case basis and shall be accompanied by a detailed plan that documents the quantity of renewable energy the proposal would generate. Point values will be determined based upon the energy generated by the proposal.</p>	TBD	
9.1.A.4 Other Renewable Energy Generation	<p>The applicant may have innovative designs or unique site circumstances (such as geothermal) that allow the project to generate electricity from renewable energy not provided in the table. The ability to supply other renewable energy and the point values allowed will be decided based upon engineering data documenting the ability to generate electricity.</p>	TBD	
Reduction Measure 5.2: Exceed Water Efficiency Standards			
5.2.A Residential Irrigation and Landscaping			
5.2.A.1 Water Efficient Landscaping	<ul style="list-style-type: none"> Limit conventional turf to < 25% of required landscape area Limit conventional turf to < 50% of required landscape area No conventional turf (warm season turf to < 50% of required landscape area and/or low water using plants are allowed) Only California Native Plants that requires no irrigation or some supplemental irrigation 	<p>0 points 2 points 4 points 5 points</p>	2
5.2.A.2 Water Efficient Irrigation Systems	<ul style="list-style-type: none"> Low precipitation spray heads < .75"/hr or drip irrigation Weather based irrigation control systems or moisture sensors (demonstrate 20% reduced water use) 	<p>1 point 2 points</p>	1

GREENHOUSE GAS EMISSIONS SCREENING TABLES

Feature	Description	Assigned Point Values	Project Points
5.2.A.3 Stormwater Reuse Systems	Innovative on-site stormwater collection, filtration, and reuse systems are being developed that provide supplemental irrigation water and provide vector control. These systems can greatly reduce the irrigation needs of a project. Point values for these types of systems will be determined based upon design and engineering data documenting the water savings.	TBD	
5.2.B Residential Potable Water			
5.2.B.1 Showers	Water Efficient Showerheads (2.0 gpm)	2 points	2
5.2.B.2 Toilets	Water Efficient Toilets (1.5 gpm)	2 points	2
5.2.B.3 Faucets	Water Efficient faucets (1.28 gpm)	2 points	
5.2.B.4 Dishwasher	Water Efficient Dishwasher (6 gallons per cycle or less)	1 point	
5.2.B.5 Washing Machine	Water Efficient Washing Machine (Water factor <5.5)	1 point	
5.2.B.6 WaterSense	EPA WaterSense Certification	7 points	
5.2.C Increase Residential Reclaimed Water Use			
5.2.C.1 Recycled Water	5% of the total project's water use comes from recycled/reclaimed water	5 points	
Reduction Measure 7.1: Alternative Transportation Options			
7.1.A Increase Residential Density			
7.1.A.1 Residential Density	<p>Designing the project with increased densities, where allowed by the General Plan and/or Zoning Ordinance, reduces GHG emissions associated with traffic in several ways. Increased densities affect the distance people travel and provide greater options for the modes of travel they choose. This strategy also provides a foundation for implementation of many other strategies, which would benefit from increased densities.</p> <p>1 point is allowed for each 10% increase in density beyond 7 units/acre, up to 500% (50 points) 31.6 DU acre which is 450% above the 7 units/acre</p>	<p>1-50 points</p> <p>45</p>	<p>45</p>
7.1.B Mixed-Use Development			
7.1.B.1 Mixed-Use	<p>Mixes of land uses that complement one another in a way that reduces the need for vehicle trips can greatly reduce GHG emissions. The point value of mixed-use projects will be determined based upon a Transportation Impact Analysis (TIA) demonstrating trip reductions and/or reductions in vehicle miles traveled. Suggested ranges:</p> <ul style="list-style-type: none"> • Diversity of land uses complementing each other (2-28 points) • Increased destination accessibility other than transit (1-18 points) • Increased Transit Accessibility (1-25 points) • Infill location that reduces vehicle trips or VMT beyond the measures described above (points TBD based on traffic data). 	TBD	

GREENHOUSE GAS EMISSIONS SCREENING TABLES

Feature	Description	Assigned Point Values	Project Points
7.1.B.2 Residential Near Local Retail (Residential only Projects)	<p>Having residential developments within walking and biking distance of local retail helps to reduce vehicle trips and/or vehicle miles traveled.</p> <p>The point value of residential projects in close proximity to local retail will be determined based upon traffic studies that demonstrate trip reductions and/or reductions in vehicle miles traveled (VMT).</p> <p>The suburban project will have at least three of the following on site and/or off site within ¼-mile: Residential Development, Retail Development, Park, Open Space, or Office.</p> <p>The mixed-use development should encourage walking and other non-auto modes of transport from residential to office/commercial locations (and vice versa). The project should minimize the need for external trips by including services/facilities for day care, banking/ATM, restaurants, vehicle refueling, and shopping.</p>	1–16 points	
7.1.C Traffic Flow Management Improvements			
7.1.C.1 Signal Synchronization	<p>Techniques for improving traffic flow include: traffic signal coordination to reduce delay, incident management to increase response time to breakdowns and collisions, Intelligent Transportation Systems (ITS) to provide real-time information regarding road conditions and directions, and speed management to reduce high free-flow speeds.</p> <ul style="list-style-type: none"> • Signal synchronization • Traffic signals connected to existing ITS 	1 point/signal 3 points/signal	
7.1.D Increase Public Transit			
7.1.D.1 Public Transit Access	<p>The point value of a projects ability to increase public transit use will be determined based upon a Transportation Impact Analysis (TIA) demonstrating decreased use of private vehicles and increased use of public transportation.</p> <p>Increased transit accessibility (1–15 points)</p>	TBD	
Reduction Measure 7.2: Adopt and Implement a Bicycle Master Plan to Expand Bike Routes around the City			
7.2.A.1 Sidewalks	<ul style="list-style-type: none"> • Provide sidewalks on one side of the street (required) • Provide sidewalks on both sides of the street • Provide pedestrian linkage between residential and commercial uses within 1 mile 	0 points 1 point 3 points	
7.2.A.2 Bicycle Paths	<ul style="list-style-type: none"> • Provide bicycle paths within project boundaries • Provide bicycle path linkages between residential and other land uses • Provide bicycle path linkages between residential and transit 	TBD 2 points 5 points	
Reduction Measure 8.1: Reduce Waste to Landfills			
8.1.A.1 Recycling	<p>City-initiated recycling program diverting 100% of waste requires coordination in neighborhoods to realize this goal. The following recycling features will help the City fulfill this goal:</p> <ul style="list-style-type: none"> • Provide green waste composting bins at each residential unit • Multi-family residential projects that provide dedicated recycling bins separated by types of recyclables combined with instructions/education program explaining how to use the bins and the importance of recycling 	4 points 3 points	
Other GHG Reduction Feature Implementation			
O.A.1 Other GHG Emissions Reduction Features	<p>This allows innovation by the applicant to provide residential design features for the GHG emissions from construction and/or operation of the project not provided in the table. Note that engineering data will be required documenting the GHG reduction amount and point values given based upon emission reductions calculations using approved models, methods, and protocols.</p>	TBD	
Total Points Earned by Residential Project:			103

ATTACHMENT C
EMFAC2021

Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area

Region: Riverside (SC)

Calendar Year: 2025

Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for CVMT and EVMT, trips/day for Trips, kWh/day for Energy Consumption, tons/day for Emissions, 1000 gallons/day for Fuel Consumption

Region	Calendar Year	Vehicle Cate	Model Year	Speed	Fuel	Population	Total VMT	CVMT	EVMT	Trips	Fuel Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Gasoline	6.232252524	303.889871	303.88987	0	124.69491	0.078875502	78.87550173	324061.9332	303.889871	2014903.459	6.22	HHDT
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Diesel	15281.49903	1950611.476	1950611.5	0	237189.49	315.5182536	315518.2536		1950611.476			
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Electricity	103.9487733	11894.93596	0	11894.936	1423.9999	0	0		11894.93596			
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Natural Gas	781.6601067	52093.15724	52093.157	0	6789.8453	8.464804133	8464.804133		52093.15724			
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Gasoline	469318.5342	20373765.83	20373766	0	2183259.5	673.3165394	673316.5394	685799.5767	20373765.83	22281991.59	32.49	LDA
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Diesel	1383.809245	49996.02059	49996.021	0	6008.5021	1.157204906	1157.204906		49996.02059			
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Electricity	23756.17576	1153396.904	0	1153396.9	118930.44	0	0		1153396.904			
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Plug-in Hybrid	14087.23202	704832.8394	341051.68	363781.16	58250.704	11.32583244	11325.83244		704832.8394			
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Gasoline	39844.42885	1499609.575	1499609.6	0	172787.76	59.92078241	59920.78241	59994.79347	1499609.575	1508277.871	25.14	LDT1
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Diesel	16.26032827	298.1728862	298.17289	0	45.895761	0.012131898	12.13189805		298.1728862			
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Electricity	84.57619148	4089.475353	0	4089.4754	421.30821	0	0		4089.475353			
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Plug-in Hybrid	76.19034646	4280.647946	1856.4427	2424.2053	315.04708	0.061879155	61.87915548		4280.647946			
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Gasoline	201900.7772	8973973.952	8973974	0	947238.81	360.0165635	360016.5635	362521.4419	8973973.952	9168424.554	25.29	LDT2
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Diesel	648.0824816	30519.42791	30519.428	0	3118.2586	0.906087045	906.0870448		30519.42791			
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Electricity	1658.408696	58637.73041	0	58637.73	8444.2936	0	0		58637.73041			
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Plug-in Hybrid	1963.286623	105293.4446	47820.906	57472.539	8118.1902	1.598791388	1598.791388		105293.4446			
Riverside (SC)	2025	LHDT1	Aggregate	Aggregate	Gasoline	17598.36242	652458.21	652458.21	0	262189.38	46.82732866	46827.32866	73403.79877	652458.21	1212550.7	16.52	LHDT1
Riverside (SC)	2025	LHDT1	Aggregate	Aggregate	Diesel	15075.59282	549831.8274	549831.83	0	189631.99	26.5764701	26576.4701		549831.8274			
Riverside (SC)	2025	LHDT1	Aggregate	Aggregate	Electricity	149.6982853	10260.66293	0	10260.663	2094.4871	0	0		10260.66293			
Riverside (SC)	2025	LHDT2	Aggregate	Aggregate	Gasoline	2462.303572	88408.90183	88408.902	0	36684.654	7.133200743	7133.200743	21661.35468	88408.90183	341190.0394	15.75	LHDT2
Riverside (SC)	2025	LHDT2	Aggregate	Aggregate	Diesel	6820.445818	250292.8301	250292.83	0	85792.628	14.52815394	14528.15394		250292.8301			
Riverside (SC)	2025	LHDT2	Aggregate	Aggregate	Electricity	38.18158868	2488.307475	0	2488.3075	506.32316	0	0		2488.307475			
Riverside (SC)	2025	MCY	Aggregate	Aggregate	Gasoline	24005.46384	138549.7935	138549.79	0	48010.928	3.307549619	3307.549619	3307.549619	138549.7935	138549.7935	41.89	MCY
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Gasoline	157992.5704	6448292.677	6448292.7	0	723018.64	323.4938203	323493.8203	328676.5122	6448292.677	6678432.543	20.32	MDV
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Diesel	2427.253752	99526.12558	99526.126	0	11179.07	4.137752355	4137.752355		99526.12558			
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Electricity	1830.142844	64565.5975	0	64565.598	9311.7129	0	0		64565.5975			
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Plug-in Hybrid	1324.504282	66048.14278	30858.79	35189.353	5476.8252	1.044939643	1044.939643		66048.14278			
Riverside (SC)	2025	MH	Aggregate	Aggregate	Gasoline	4508.467531	38795.29207	38795.292	0	451.02709	7.939175542	7939.175542	9582.26868	38795.29207	55815.16631	5.82	MH
Riverside (SC)	2025	MH	Aggregate	Aggregate	Diesel	2015.081247	17019.87424	17019.874	0	201.50812	1.643093138	1643.093138		17019.87424			
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Gasoline	1219.56756	49718.98291	49718.983	0	24401.108	9.418016992	9418.016992	73843.62953	49718.98291	635118.1523	8.60	MHDT
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Diesel	13275.74248	571359.1019	571359.1	0	157106.46	63.53271272	63532.71272		571359.1019			
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Electricity	118.7135177	6143.919124	0	6143.9191	1476.0162	0	0		6143.919124			
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Natural Gas	169.7860028	7896.148358	7896.1484	0	1496.1507	0.892899818	892.8998181		7896.148358			
Riverside (SC)	2025	OBUS	Aggregate	Aggregate	Gasoline	362.5102847	12151.28279	12151.283	0	7253.1058	2.347950658	2347.950658	4510.758842	12151.28279	29688.04546	6.58	OBUS
Riverside (SC)	2025	OBUS	Aggregate	Aggregate	Diesel	224.9321911	15183.67961	15183.68	0	2552.2277	1.940769719	1940.769719		15183.67961			
Riverside (SC)	2025	OBUS	Aggregate	Aggregate	Electricity	2.021694394	134.2617193	0	134.26172	40.450061	0	0		134.2617193			
Riverside (SC)	2025	OBUS	Aggregate	Aggregate	Natural Gas	36.9521167	2218.821339	2218.8213	0	328.87384	0.222038465	222.0384652		2218.821339			
Riverside (SC)	2025	SBUS	Aggregate	Aggregate	Gasoline	426.2067312	16859.59503	16859.595	0	1704.8269	1.92304347	1923.04347	5926.536182	16859.59503	38036.5897	6.42	SBUS
Riverside (SC)	2025	SBUS	Aggregate	Aggregate	Diesel	483.8964136	9931.139032	9931.139	0	7006.8201	1.352394432	1352.394432		9931.139032			
Riverside (SC)	2025	SBUS	Aggregate	Aggregate	Electricity	5.22909553	143.1587763	0	143.15878	65.395323	0	0		143.1587763			
Riverside (SC)	2025	SBUS	Aggregate	Aggregate	Natural Gas	457.8096259	11102.69686	11102.697	0	6629.0834	2.65109828	2651.09828		11102.69686			
Riverside (SC)	2025	UBUS	Aggregate	Aggregate	Gasoline	146.4959788	18545.85863	18545.859	0	585.98392	3.288543187	3288.543187	10964.44655	18545.85863	49731.99827	4.54	UBUS
Riverside (SC)	2025	UBUS	Aggregate	Aggregate	Diesel	0.3117338	30.10971099	30.109711	0	1.2469352	0.002675115	2.675115035		30.10971099			
Riverside (SC)	2025	UBUS	Aggregate	Aggregate	Electricity	0.20926462	33.75780976	0	33.75781	0.8370585	0	0		33.75780976			
Riverside (SC)	2025	UBUS	Aggregate	Aggregate	Natural Gas	252.5418031	31122.27213	31122.272	0	1010.1672	7.673228246	7673.228246		31122.27213			

Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area

Region: Riverside (SC)

Calendar Year: 2026

Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for CVMT and EVMT, trips/day for Trips, kWh/day for Energy Consumption, tons/day for Emissions, 1000 gallons/day for Fuel Consumption

Region	Calendar Year	Vehicle Cate	Model Year	Speed	Fuel	Population	Total VMT	CVMT	EVMT	Trips	Fuel Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Gasoline	5.301713201	269.8155783	269.81558	0	106.07668	0.068469804	68.46980429	326183.3321	269.8155783	2063431.007	6.33	HHDT
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Diesel	15687.78827	1988453.103	1988453.1	0	243817.41	317.4311809	317431.1809		1988453.103			
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Electricity	181.0556624	20854.79688	0	20854.797	2491.2975	0	0		20854.79688			
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Natural Gas	822.9858358	53853.29132	53853.291	0	7117.4973	8.683681391	8683.681391		53853.29132			
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Gasoline	470220.2179	20338993.18	20338993	0	2185331.2	657.9019755	657901.9755	670683.7214	20338993.18	22423581.77	33.43	LDA
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Diesel	1278.903087	45656.81459	45656.815	0	5545.9993	1.04446634	1044.46634		45656.81459			
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Electricity	27110.24505	1294343.513	0	1294343.5	135099.14	0	0		1294343.513			
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Plug-in Hybrid	15111.22646	744588.2646	352889.01	391699.26	62484.921	11.73727955	11737.27955		744588.2646			
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Gasoline	39097.73904	1475770.596	1475770.6	0	169714.19	57.77065353	57770.65353	57860.51954	1475770.596	1487146.031	25.70	LDT1
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Diesel	13.62192751	246.3725383	246.37254	0	37.88513	0.009960174	9.960173709		246.3725383			
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Electricity	113.2552136	5510.233656	0	5510.2337	566.22421	0	0		5510.233656			
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Plug-in Hybrid	101.686721	5618.828531	2393.9235	3224.905	420.47459	0.079905828	79.90582849		5618.828531			
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Gasoline	207104.2919	9189016.153	9189016.2	0	971544.95	359.2463978	359246.3978	361967.9264	9189016.153	9414279.735	26.01	LDT2
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Diesel	682.5626595	31821.71127	31821.711	0	3275.2249	0.923868936	923.8689364		31821.71127			
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Electricity	2094.273367	72949.08151	0	72949.082	10611.729	0	0		72949.08151			
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Plug-in Hybrid	2291.195555	120492.7893	53682.529	66810.261	9474.0936	1.797659677	1797.659677		120492.7893			
Riverside (SC)	2026	LHDT1	Aggregate	Aggregate	Gasoline	17398.34216	648258.6134	648258.61	0	259209.37	45.43230342	45432.30342	71378.10447	648258.6134	1205852.586	16.89	LHDT1
Riverside (SC)	2026	LHDT1	Aggregate	Aggregate	Diesel	14868.32038	538771.2685	538771.27	0	187024.77	25.94580105	25945.80105		538771.2685			
Riverside (SC)	2026	LHDT1	Aggregate	Aggregate	Electricity	286.9935654	18822.70429	0	18822.704	4016.6871	0	0		18822.70429			
Riverside (SC)	2026	LHDT2	Aggregate	Aggregate	Gasoline	2430.034218	87077.56554	87077.566	0	36203.889	6.894650038	6894.650038	21104.05262	87077.56554	337819.1023	16.01	LHDT2
Riverside (SC)	2026	LHDT2	Aggregate	Aggregate	Diesel	6777.719033	246178.6334	246178.63	0	85255.179	14.20940258	14209.40258		246178.6334			
Riverside (SC)	2026	LHDT2	Aggregate	Aggregate	Electricity	73.06243174	4562.903373	0	4562.9034	969.19615	0	0		4562.903373			
Riverside (SC)	2026	MCY	Aggregate	Aggregate	Gasoline	23937.33086	137142.5787	137142.58	0	47874.662	3.259850983	3259.850983	3259.850983	137142.5787	137142.5787	42.07	MCY
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Gasoline	157654.7501	6425602.492	6425602.5	0	721133.35	314.7102388	314710.2388	319841.9429	6425602.492	6678197.896	20.88	MDV
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Diesel	2395.180805	96875.32958	96875.33	0	10973.889	3.958815392	3958.815392		96875.32958			
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Electricity	2298.450518	79855.22944	0	79855.229	11636.409	0	0		79855.22944			
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Plug-in Hybrid	1539.714974	75864.84529	34580.25	41284.595	6366.7214	1.172888712	1172.888712		75864.84529			
Riverside (SC)	2026	MH	Aggregate	Aggregate	Gasoline	4250.734566	36312.00617	36312.006	0	425.24349	7.425870006	7425.870006	9021.53348	36312.00617	52833.22222	5.86	MH
Riverside (SC)	2026	MH	Aggregate	Aggregate	Diesel	1981.725027	16521.21606	16521.216	0	198.1725	1.595663475	1595.663475		16521.21606			
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Gasoline	1204.155669	49534.83957	49534.84	0	24092.747	9.263997368	9263.997368	74067.74937	49534.83957	646239.7348	8.72	MHDT
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Diesel	13571.64646	577213.7586	577213.76	0	160736.4	63.87135704	63871.35704		577213.7586			
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Electricity	219.063018	11241.81607	0	11241.816	2720.0017	0	0		11241.81607			
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Natural Gas	180.8134913	8249.320573	8249.3206	0	1589.9111	0.932394966	932.394966		8249.320573			
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Gasoline	350.9276772	11597.74291	11597.743	0	7021.361	2.216471452	2216.471452	4375.818964	11597.74291	29375.18585	6.71	OBUS
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Diesel	230.0918445	15233.6578	15233.658	0	2621.2724	1.930307181	1930.307181		15233.6578			
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Electricity	3.398598414	222.0634986	0	222.0635	67.999157	0	0		222.0634986			
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Natural Gas	39.09901647	2321.721637	2321.7216	0	347.98125	0.229040331	229.0403313		2321.721637			
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Gasoline	428.6165302	16957.83533	16957.835	0	1714.4661	1.930418011	1930.418011	5931.110106	16957.83533	38160.16985	6.43	SBUS
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Diesel	474.8674611	9627.108018	9627.108	0	6876.0808	1.308586985	1308.586985		9627.108018			
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Electricity	8.960082283	245.5300912	0	245.53009	112.7096	0	0		245.5300912			
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Natural Gas	472.4302591	11329.69641	11329.696	0	6840.7902	2.69210511	2692.10511		11329.69641			
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Gasoline	146.7792196	18580.60009	18580.6	0	587.11688	3.25315693	3253.15693	10939.25606	18580.60009	49832.17645	4.56	UBUS
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Diesel	0.31137338	30.10971099	30.109711	0	1.2469352	0.002675115	2.675114958		30.10971099			
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Electricity	0.298524289	49.15190367	0	49.151904	1.1940972	0	0		49.15190367			
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Natural Gas	252.9741581	31172.31474	31172.315	0	1011.8966	7.683424013	7683.424013		31172.31474			